



D

General Technical Information



Cemented Carbide products safety standard

1. Safety responsibilities


Before using ZCCCT products, please provide necessary safety training for operators, and carefully read the 'NOTE' and 'CAUTION' contents on the product package. We are not liable for any responsibility caused by not complying with the request for operation.

2. Features of cemented carbide materials

Cemented carbide cutting tools are mainly composed of W, C, Co, N, Ti, Si, Al, O, etc elements and their chemical compound, and come into shape after sintering and a series of subsequent machining. Cemented carbide tool has good chemical stability and high strength. It is the ideal tool to cut most metals and high-strength nonmetals.

3. Cautions for safely using cemented carbide tools

- 1) Cemented carbide is hard and frangible material, liable to brittle rupture and breakage due to larger force or partial stress, which causes sharp edge.
- 2) Most cemented carbide is mainly composed of W and Co with high density. In the process of transport and storage, it should be treated as great heavy object and be handled with care.
- 3) Cemented carbide and steel have different thermal expansion coefficients. To avoid breakage caused by concentrated stress, welding should be conducted under suitable temperature.
- 4) Cemented carbide tools should be stored in dry environment, away from corrosive atmosphere.
- 5) In the cutting process, it is unavoidable to generate chips and brittle discs, etc. Please make sure necessary labor protection articles are prepared before machining.
- 6) If coolant is needed in the cutting process, please select correct coolant to prolong machine and tool life.
- 7) If cracks are generated in the machining process, please stop using the tool.
- 8) Long use of cemented carbide tool will lead to cutting edge passivation and lower strength. Please make sure it is regrinded by professionals
- 9) Please collect the broken tools and chips properly to avoid injury to other people.

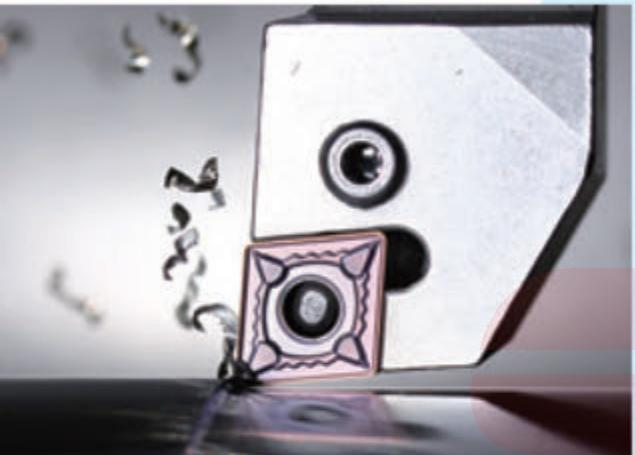

Cautions for safely using cutting tools

Danger	Protective measure
Direct contact with the sharp cutting edges may cause injuries.	Please use labor protection articles such as gloves when assembling or disassembling cutting tools on machine.
Improper use of tools may cause tool breakage and expulsion from machine, causing injuries.	Please read catalogue and safety standard before operating. Please wear safeguard glasses and protective clothes.
Rapid increase of cutting resistance due to excessive abrasion and severe impact may lead to breakage of tool and spatter of chips, thus cause injuries to operator.	Change the tool with excessive abrasion without delay. Please wear safeguard glasses and protective clothes.
In the cutting process, hot chips may cause scald and scratch on operator.	Please use tools such as pliers to clear away the chips in time. Please wear safeguard glasses and protective clothes.
In cutting process, sparks and hot chips may cause fire and explosion hazard.	Clear away the inflammable and explosive materials in the cutting area. Please make sure the fire extinguishers are ready for use.
At high speed, the machine will vibrate severely because of poor balance of holder, causing tool breakage.	Check whether the machine is loose or has any abnormal noise before cutting. Please wear safeguard glasses and protective clothes.
Burrs on workpiece are very sharp and likely to cause injuries.	Do not touch the burrs on the workpiece with bare hand. Please wear protective gloves and clothes.
Machining workpiece held infirmly will cause tool breakage and spatter of workpiece.	Make sure the workpiece is clamped firmly. Please wear safeguard glasses and protective clothes.
If inserts or spare parts are not clamped properly, they may become loose and fly off, causing risk of injuries.	Make sure the inserts and spare parts are clamped firmly before machining.
If inserts and tool are clamped too tightly with screw and clamp, they face the risk of breakage and spatter.	Please do not clamp tools too tightly with bushing.
Inserts or spare parts may fly off due to inertial centrifugal force at high cutting speed.	Use the tools within recommended cutting conditions. Please wear safeguard glasses and protective clothes.
Milling cutters have sharp cutting edges and direct contact with them may cause injuries.	For your safety, please wear protective gloves if you need to touch inserts.
During rotary cutting, clothes, gloves, etc. are easily to get wringed in the machine at high speed, thus cause casualties.	The operator should not wear gloves during rotary cutting. Please pay attention that the clothes should not contact the operational parts of machine.
Off-center or poor balance of tools in rotating machining will cause vibration, breakage and splash of tool, thus will cause injuries.	Please use the tools within the range of recommended rotating speed. Check and adjust machine balance periodically.
During cutting at high speed, the chips flying off rapidly may cause injuries.	Safeguard articles such as protective cover, screen, etc. should be used. Please wear safeguard glasses, protective clothes and gloves.
Using the extremely small drill is likely to cause tool breakage and spatter, and it would be hard to take out the broken part.	Reduce tool vibration and conduct machining at suitable speed. Please wear safeguard glasses, protective clothes and gloves.
Machine and tools may be damaged if they are used beside the range of specified purposes, thus may cause other risks.	Please use them strictly according to instructions and specified purposes.

Note: We are not responsible for any accidents caused by private modified tools without our permission.



Threading pre-hole diameter

● Metric common thread

Thread code	Recommended hole diameter (mm)
M3×0.5	2.5
M3.5×0.6	2.9
M4×0.7	3.3
M5×0.8	4.2
M6×1.0	5.0
M7×1.0	6.0
M8×1.25	6.75
M9×1.25	7.75
M10×1.5	8.5
M11×1.5	9.5
M12×1.75	10.25
M14×2.0	12.0
M16×2.0	14.0
M18×2.5	15.5
M20×2.5	17.5
M24×3.0	21.0
M27×3.0	24.0
M30×3.5	26.5

● Metric fine thread

Thread code	Recommended hole diameter (mm)	Thread code	Recommended hole diameter (mm)
M3×0.35	2.65	M14×1.5	12.5
M3.5×0.35	3.15	M14×1.0	13.0
M4×0.5	3.5	M15×1.5	13.5
M4.5×0.5	4.0	M15×1.0	14.0
M5×0.5	4.5	M16×1.5	14.5
M5.5×0.5	5.0	M16×1.0	15.0
M6×0.75	5.25	M17×1.5	15.5
M7×0.75	6.25	M17×1.0	16.0
M8×1.0	7.0	M18×2.0	16.0
M8×0.75	7.25	M18×1.5	16.5
M9×1.0	8.0	M18×1.0	17.0
M9×0.75	8.25	M20×2.0	18.0
M10×1.25	8.75	M20×1.5	18.5
M10×1.0	9.0	M20×1.0	19.0
M10×0.75	9.25	M22×2.0	20.0
M11×1.0	10.0	M22×1.5	20.5
M11×0.75	10.25	M22×1.0	21.0
M12×1.5	10.5	M24×2.0	22.0
M12×1.25	10.75	M24×1.5	22.5
M12×1.0	11.0	M24×1.0	23.0

Surface roughness

The surface roughness refers to the small space and unevenness from peak to valley on workpiece surface.

Surface roughness has close relationship with the matching property of machine elements, wear resistance, machining precision and corrosion resistance. It influences the reliability and life of machine and instrument.

Type	Code	Calculation method	Calculation example (figure)
Arithmetic average deviation of profile	R _a	<p>Within sampling length l, the arithmetic average absolute value of profile deviation is</p> $R_a = \frac{1}{l} \int_0^l y(x) dx$ <p>In the formula, the profile deviation y is the distance between profile points and reference line in the measuring direction. Reference line is the profile least-square average line O. This line divides the profile and makes the sum of squares of profile deviation to be the minimum within the sampling length.</p>	
Irregularity Ten-point height	R _z	<p>Within sampling length l, the sum of the average value of heights of five highest profile peak and the depths of five deepest profile valleys</p> $R_z = \frac{\sum_{i=1}^5 y_{pi} + \sum_{i=1}^5 y_{vi}}{5}$ <p>In the formula, y_{pi} means the height of the i'th highest profile peak. In the formula, y_{vi} means the depth of the i'th deepest profile valley.</p> <p>Maximum height of profile R_y: the distance between the top profile peak line and the bottom profile valley line in the longitudinal direction within the sampling length l.</p>	
Maximum height of profile	R _y	<p>The distance between the inner profile peak line and the bottom profile valley line in the longitudinal direction within the sampling length l. Top profile peak line is the line that parallels to the reference line and passes through the highest point of profile peak. Bottom profile line is the line that parallels to the reference line and passes through the lowest point of profile valley.</p>	

The value of sampling length l and evaluated length ln

R _a / μm	R _z / μm	l/mm	ln=5l /mm
≥0.008~0.02	≥0.025~0.10	0.08	0.4
>0.02~0.1	>0.1~0.50	0.25	1.25
>0.1~0.2	>0.50~10.0	0.8	4.0
>0.2~10.0	>10.0~50.0	2.5	12.5
>10.0~80.0	>50~320	8.0	40.0



GENERAL TECHNICAL INFORMATION

Material cross comparison table

Material cross comparison table

ISO	Country and Standard										
	China	USA	Germany		Great Britain		Sweden	France	Italy	Spain	Japan
	GB	AISI/SAE	W.-nr	DIN	BS	EN	SS	AFNOR	UNI	UNE	JIS
Structural steel											
15	1015	1.0401	C15	080M15	-	1350	CC12	C15C16	F.111	-	
20	1020	1.0402	C22	050A20	2C	1450	CC20	C20C21	F.112	-	
35	1035	1.0501	C35	060A35	-	1550	CC35	C35	F.113	-	
45	1045	1.0503	C45	080M40	-	1650	CC45	C45	F.114	-	
55	1055	1.0535	C55	070M55	-	1655	-	C55	-	-	
60	1060	1.0601	C60	080A62	43D	-	CC55	C60	-	-	
Y15	1213	1.7015	9SMn28	230M07	-	1912	S250	CF9SMn28	11SMn28	SUM22	
-	12L13	1.0718	9SMnPb28	-	-	1914	S250Pb	CF9MnPb28	11SMnPb28	SUM22L	
-	-	1.0722	10SPb20	-	-	-	10PbF2	CF10Pb20	10SPb20	-	
-	1140	1.0726	35S20	212M36	8M	1957	35MF4	-	F210G	-	
Y13	1215	1.0736	9SMn36	240M07	1B	-	S300	CF9SMn36	12SMn35	-	
-	12L14	1.0737	9SMnPb36	-	-	1926	S300Pb	CF9SMnPb36	12SMnP35	-	
55Si2Mn	9255	1.0904	55Si9	250A53	45	2085	55S7	55Si8	56Si7	-	
-	9262	1.0961	60SiCr7	-	-	-	60SC7	60SiCr8	60SiCr8	-	
15	1015	1.1141	Ck15	080M15	32C	1370	XC12	C16	C15K	S15C	
40Mn	1039	1.1157	40Mn4	150M36	15	-	35M5	-	-	-	
25	1025	1.1158	Ck25	-	-	-	-	-	-	S25C	
35Mn2	1335	1.1167	36Mn5	-	-	2120	40Mn5	-	36Mn5	SMn438(H)	
30Mn	1330	1.1170	28Mn6	150M28	14A	-	20M5	C28Mn	-	SCMn1	
35Mn	1035	1.1183	Cf35	060A35	-	1572	XS38TS	C36	-	S35C	
Ck45	1045	1.1191	45	080M46	-	1672	XC42	C45	C45K	S45C	
55	1055	1.1203	Ck55	070M55	-	-	XC45	C50	C55K	S55C	
50	1050	1.1213	Cf53	060A52	-	1674	XC48TS	C53	-	S50C	
60Mn	1060	1.1221	Ck60	080A62	43D	1678	XC60	C60	-	S58C	
-	1095	1.1274	Ck101	060A96	-	1870	-	-	-	SUP4	
-	-	1.3401	X120Mn12	Z120M12	-	-	X120M12	XG120Mn12	X120Mn12	SCMnH/1	
Gr15;45Gr	52100	1.3505	100Cr6	534A99	31	2258	100C6	100Cr6	F.131	SUJ2	
-	ASTM A204Gr.A	1.5415	15Mo3	1501-240	-	2912	15D3	16Mo3KW	16Mo3	-	
-	4520	1.5426	16Mo5	1503-245-420	-	-	-	16Mo5	16Mo5	-	
-	ASTM A350LF5	1.5622	14Ni6	-	-	-	16N6	14Ni6	15Ni6	-	
-	ASTM A353	1.5662	X8Ni9	1501-509;510	-	-	-	X10Ni9	XBNi09	-	

GENERAL TECHNICAL INFORMATION

Material cross comparison table

ISO	Country and Standard									
	China	USA	Germany		Great Britain		Sweden	France	Italy	Spain
	GB	AISI/SAE	W.-nr	DIN	BS	EN	SS	AFNOR	UNI	UNE
Structural steel										
-	2515	1.5680	12Ni19	-	-	-	Z18N5	-	-	-
-	3135	1.5710	36NiCr6	640A35	111A	-	35NC6	-	-	SNC236
-	3415	1.5732	14NiCr10	-	-	-	14NC11	16NiCr11	15NiCr11	SNC415(H)
-	3415 3310	1.5752	14NiCr14	655M13 655A12	36A	-	12NC15	-	-	SNC815(H)
-	9840	1.6511	36CrNiMo4	816M40	110	-	40NCD3	38CrNiMo4(KB)	35CrNiMo4	-
-	8620	1.6523	21NiCrMo2	850M20	362	2503	20NCD2	20NiCrMo2	20NiCrMo2	SNCM220(H)
-	8740	1.6546	40NiCrMo2	311-Type7	-	-	-	40NiCrMo2(KB)	40NiCrMo2	SNC240
40CrNiMoA	4340	1.6582	34CrNiMo6	817M40	24	2541	35NCD6	35CrNiMo6(KB)	-	-
-	-	1.6587	17CrNiMo6	820A16	-	-	18NCD6	-	14CrNiMo13	-
15Cr	5015	1.7015	15Cr3	523M15	-	-	12C3	-	-	SCR415(H)
35Cr	5132	1.7033	34Cr4	530A32	18B	-	32C4	34Cr4(KB)	35Cr4	SCR430(H)
40Cr	5140	1.7035	41Cr4	530M40	18	-	42C4	41Cr4	42Cr4	SCR440(H)
40Cr	5140	1.7045	42Cr4	-	-	2245	-	-	42Cr4	SCR440
18CrMn	5115	1.7131	16MnCr15	(527M20)	-	2511	16MC5	16MnCr15	16MnCr15	-
20CrMn	5155	1.7176	55Cr3	527A60	48	-	55C3	-	-	SUP9(A)
30CrMn	4130	1.7218	25CrMo4	1717CDS110	-	2225	25CD4	25CrMo4(KB)	55Cr3	SCM420; SCM430
35CrMo	4137;4135	1.7220	34CrMo4	708A37	19B	2234	35CD4	35CrMo4	34CrMo4	SCM432; SCRRM3
40CrMoA	4140;4142	1.7223	41CrMo4	708M40	19A	2244	42CD4TS	41CrMo4	41CrMo4	SCM440
42CrMo 42CrMnMo	4140	1.7225	42CrMo4	708M40	19A	2244	42CD4	42CrMo4	42CrMo4	SCM440(H)
-	-	1.7262	15CrMo5	-	-	2216	12CD4	-	12CrMo4	SCM415(H)
-	ASTM A182 F11;F12	1.7335	13CrMo44	1501- 620Gr.27	-	-	15CD3.5; 15CD4.5	14CrMo44	14CrMo45	-
-	-	1.7361	32CrMo12	722M24	40B	2240	30CD12	32CrMo12	F.124.A	-
-	ASTM A182 F.22	1.7380	10CrMo910	1501- 622Gr.31;45	-	2218	12CD9;10	12CrMo9,10	TU.H	-
-	-	1.7715	14MoV63	1503-660-440	-	-	-	-	13MoCrV6	-
50CrVA	6150	1.8159	50CrV4	735A50	47	2230	50CV4	50CrV4	51CrV4	SUP10
-	-	1.8509	41CrAlMo7	905M39	41B	2940	40CAD6,12	41CrAlMo7	41CrAlMo7	-
-	-	1.8523	39CrMoV139	897M39	40C	-	-	36CrMoV12	-	-



GENERAL TECHNICAL INFORMATION

Material cross comparison table

ISO	Country and Standard									
	China	USA	Germany		Great Britain	Sweden	France	Italy	Spain	
	GB	AISI/ SAE	W.-nr	DIN	BS	EN	SS	AFNOR	UNI	UNE
Tool steel										
T10	W.110	1.1545	C105W1	-	-	1880	Y105	C98KU C100KU	F.515 F.516	
T12A	W.112	1.1663	C125W	-	-	-	Y120	C120KU	(C120)	SK2
CrV,9SiCr	L3	1.2067	100Cr6	BL3	-	-	Y100C6	-	100Cr6	-
Cr12	D3	1.2080	X210Cr12	BD3	-	-	Z200Cr12	X210Cr13KU X250Cr12KU	X210Cr12	SKD1
4Cr5MoVSi	H13	1.2344	X40CrMoV5 1	BH13	-	2242	Z40CDV5	X35CrMoV05KU X40CrMoV51KU	X40CrMoV5	SKD61
Cr6WV	A2	1.2363	X100CrMoV5 1	BA2	-	2260	Z100CDV5	X100CrMoV51KU	X100CrMoV5	SKD12
CrWMo	-	1.2419	105WCr6	-	-	2140	105WC13	10WCr6 107WCr5KU	105WCr5	SKS31 SKS2 SKS3
Cr12W	-	1.2436	X210CrW12	-	-	2312	-	X215CrW12 1KU	X210CrW12	SKD2
5CrNiMo	S1	1.2542	45WCrV7	BS1	-	2710	-	45WCrV8KU	45WCrSi8	-
3Cr2W8V	H21	1.2581	X30WCrV9 3 X30WCrV93KU	BH21	-	-	Z30WCV9	X28W09KU X30WCrV9 3KU	X30WCrV9	SKD5
Cr12MoV	-	1.2601	X165CrMoV 12	-	-	2310	-	X165CrMoW12KU	X160CrMoV12	SKD11
5CrNiMo	L6	1.2713	55NiCrMoV6	-	-	-	55NCDV7	-	F.250.S	SKT4
V	W210	1.2833	100V1	BW2	-	-	Y105V	-	-	SKS43
W6Mo5Cr4V2Co5	-	1.3243	S6-5-2-5	-	-	2723	Z85WDKCV	HS6-5-2-5	HS6-5-2-5	SKH55
W18Cr4VCo5	T4	1.3255	S18-1-2-5	BT4	-	-	Z80WKC 10-05-04-01	X78WCo1805KU	HS18-1-1-5	SKH3
W6Mo5Cr4V2	M2	1.3343	S6-5-2	BM2	-	2722	Z85WDCV 06-05-04-02	X82WMo0605KU	HS6-5-2	SKH9
-	M7	1.3348	S2-9-2	-	-Z-	2782	Z100WCWV 09-02-04-02	HS2-9-2	HS2-9-2	-
W18Cr4V	T1	1.3355	S18-0-1	BT1	-	-	Z80WCV 18-04-01	X75W18KU	HS18-0-1	SKH2
W6Mo5Cr4V3	M3	-	S6-5-3	-	-	-	-	-	-	SKH52
-	M42	-	-	BM42	-	-	-	-	-	SKH59

GENERAL TECHNICAL INFORMATION

Material cross comparison table

ISO	Country and Standard					Main application
	China	USA	Germany	Japan	Daido Steel Co., Ltd (Japan)	
	GB	AISI/SAE	DIN	JIS	DAIDO	
Plastic die steel						
-	P20 mod.	-	-	-	PX5N	For mass production of large mirror dies. Automobile rear light, front fender of car, video camera, household electrical appliances etc
-	-	-	-	-	NAK55	For high-precision mirror die. Video camera, music disc, cosmetic containers, transparent covers, transparent films etc
-	-	-	-	-	NAK80	For high-precision mirror dies. Video camera, music disc, cosmetic containers, transparent covers, transparent films etc
3Cr13	420 mod.	-	SUS420J2 mod.	-	S-STAR	For ultra-mirror corrosion resistant precise dies. Accessories of camera, CD, lens, watch case
Cold-working die steel						
P	02	-	SKS93	YK30	-	Stamping die, gauge calipers, paper cutter, auxiliary tools
9CrWMn	01 mod.	-	SKS3 mod.	GOA	-	Blanking die, gauge calipers, drawing die, laps, Perforated punch
Cr12MoV	D2	X165CrMoV12	SKD11	DC11	-	Blanking die, cold forming die, cold drawing die, forming roller, punch
-	D2 mod.	-	SKD11 mod.	DC53	-	Blanking die, cold forming die, cold drawing die, forming roll, punch
Hot-working die steel						
4Cr5MoSiV1	H13	X40CrMoV51	SKD61	DHA1	-	Aluminum compression die, connecting parts of compression die, hot stamping die, hot extrusion die, thermal shear cutting blade
-	-	-	-	DH21	-	Long life aluminum compression die
-	-	-	-	DH31-S	-	Large compression die
-	-	-	-	DH2F	-	Compression die, plastic die



GENERAL TECHNICAL INFORMATION

Material cross comparison table

ISO	Country and Standard										
	China	USA	Germany		Great Britain		Sweden	France	Italy	Spain	Japan
	GB	AISI/ SAE	W-nr	DIN	BS	EN	SS	AFNOR	UNI	UNE	JIS
Stainless steel											
M	0Cr13; 1Cr12	403	1.4000	X6Cr13	403S17	-	2301	Z6C13	X6Cr13	F.3110	SUS403
	-	-	1.4001	X7Cr14	-	-	-	-	-	F.8401	-
	1Cr13	410	1.4006	X10Cr13	410S21	56A	2302	Z10C14	X12Cr13	F.3401	SUS410
	1Cr17	430	1.4016	X6Cr17	430S15	60	220	Z8C17	X8Cr17	F.3113	SUS430
	2Cr13	410	1.4021	X20Cr13	S62	56B; 56C	-	Z20C13	X20C13	F.3401	SUS410
	-	-	1.4027	G-X20Cr14	420C29	56B	-	Z20C13M	-	-	SCS2
	4Cr13	-	1.4034	X46Cr13	420S45	56D	2304	Z40CM Z38C13M	X40Cr14	F.3405	SUS420J2
	1Cr17Ni2	431	1.4057	X20CrNi172	431S29	57	2321	Z15CrNi6.02	X16CrNi16	F.3427	SUS431
	Y1Cr17	430F	1.4104	X12CrMoS17	-	-	2383	Z10CF17	X10CrS17	F.3117	SUS430F
	1Cr17Mo	434	1.4113	X6CrMo171	434S17	-	2325	Z8CD17.01	X8CrMo17	-	SUS434
	-	-	1.4313	X5CrNi134	425C11	-	-	Z4CND13.4M	-	-	SCS5
	-	-	1.4408	G-X6CrNiMo1810	316C16	-	-	-	-	F.8414	SCS14
	4Cr9Si2	HW3	1.4718	X45CrSi93	401S45	52	-	Z45CS9	X45CrSi8	F.322	SUH1
	0Cr13Al	405	1.4724	X10CrAl13	403S17	-	-	Z10C13	X10CrAl12	F.311	SUS405
	Cr17	430	1.4742	X10CrAl18	430S15	60	-	Z10CAS18	X8Cr17	F.3113	SUS430
	8Cr20Si2Ni	HNV6	1.4757	X80CrNiSi20	443S65	59	-	Z80CSN20.02	X80CrSiNi20	F.320V	SUH4
	2Cr25N	446	1.4762	X10CrAl24	-	-	2322	Z10CAS24	X16Cr26	-	SUH446
Austenitic stainless steel											
	0Cr18Ni9	304	1.4301	X5CrNi1810	304S15	58E	2332	Z6CN18.09	X5CrNi1810	F.3551; F.3541; F.3504	SUS304
	1Cr18Ni9MoZr	303	1.4305	X10CrNiS189	303S21	58M	2346	Z10CNF18.09	X10CrNiS18.09	F.3508	SUS303
	0Cr19Ni10	304L	1.4306	X2CrNi1911	304S12	-	2352	Z2CN18.10	X2CrNi18.11	F.3503	SCS19
	-	-	1.4308	G-X6CrNi189	304C15	-	-	Z6CN18.10M	-	-	SCS13
	Cr17Ni7	301	1.4310	X12CrNi177	-	-	2331	Z12CN17.07	X12CrNi1707	F.3517	SUS301
	-	304LN	1.4311	X2CrNiN1810	304S62	-	2371	Z2CN18.10	-	-	SUS304LN
	0Cr19Ni9	304	1.4350	X5CrNi189	304S31	58E	-	Z6CN18.09	X5CrNi1810	-	SUS304
	0Cr17Ni11Mo2	316	1.4401	X5CrNiMo1712	316S16	Z6CND17.11	2347	1.4401	X5CrNiMo1712	F.3543	SUS316
	00Cr17Ni13Mo2	316LN	1.4429	X2CrNiMoN17133	-	-	2375	Z2CND17.13	-	-	SUS316LN
	0Cr27Ni12Mo3	316L	1.4435	X2CrNiMo18143	316S12	-	2353	Z2CDN17.13	X2CrNiMo1713	-	SCS16,
	00Cr19Ni13Mo3	317L	1.4438	X2CrNiMo17133	317S12	-	2367	Z2CND19.15	X2CrNiMo18.16	-	SUS317L
	-	329L	1.4460	X8CrNiMo275	-	-	2324	-	-	-	SUS329L; SCH11; SCS11
	1Cr18Ni9Ti	321	1.4541	X6CrNiTi1810	2337	321S12	58B	Z6CNT18.10	X6CrNiTi1811	F.3553	SUS321
	1Cr18Ni11Nb	347	1.4550	X6CrNiNb1810	347S17	58F	2338	Z6CNNb18.1	X6CrNiTi1811	F.3552	SUS347
	Cr18Ni12Mo2Ti	316Ti	1.4571	X6CrNiMoTi1722	320S17	58J	2350	Z6NDT17.12	X6CrNiMoTi17	F.3535	-

GENERAL TECHNICAL INFORMATION

Material cross comparison table

ISO	Country and Standard										
	China	USA	Germany		Great Britain		Sweden	France	Italy	Spain	Japan
	GB	AISI/ SAE	W.-nr	DIN	BS	EN	SS	AFNOR	UNI	UNE	JIS
Austenitic stainless steel											
M	-	-	1.4581	G-X5CrNiMoNb1810	318C7	-	-	Z4CNDNb1812M	XG8CrNiMo18	-	SCS22
	Cr17Ni12Mo3Nb	318	1.4583	X10CrNiMoNb1812	-	-	-	Z6CNDNb1713B	X6CrNiMoTiNb17	-	-
	1Cr23Ni13	309	1.4828	X15CrNiSi2012	309S24	-	-	Z15CNS20.1	-	-	SUH309
	0Cr25Ni20	310S	1.4845	X12CrNi2521	310S24	-	2361	Z12CN2520	X6CrNi2520	F.331	SUH310
	Cr15Ni36W3Ti	330	1.4864	X12NiCrSi3616	-	-	-	Z12CNS35.1	-	-	SUH330
	-	-	1.4865	G-X40NiCrSi3818	330C11	-	-	-	XG50NiCr3919	-	SCH15
	5Cr2Mn9Ni4N	EV8	1.4871	X53CrMnNiN219	349S54; 321S12	58B	-	Z52CMN21.0	X53CrMnNiN219	-	SUH35
	1Cr18Ni9Ti	321	1.4878	X12CrNiTi189	321S320	58C	-	Z6CNT18.12	X6CrNiTi1811	F.3523	SU321

ISO	Country and Standard									
	China	USA	Germany	Great Britain	Sweden	France	Italy	Spain	Japan	
Nodular cast iron										
K	QT400-18	60-40-18	GGG40	400/17	0717-02	FGS370-17	GS370-17	FGE38-17	FCD400	
	QT450-10	65-45-12	-	420/12	-	FGS400-12	GS400-12	FGE42-12	FCD450	
	QT500-7	70-50-05	GGG50	500/7	0727-02	FGS500-7	GS500-7	FGE50-7	FCD500	
	QT600-3	80-60-03	GGG60	600/7	0732-03	FGS600-2	GS600-2	FGE60-2	FCD600	
	QT700-2	100-70-03	GGG70	700/2	0737-01	FGS700-2	GS700-2	FGE70-2	FCD700	
	QT800-2	120-90-02	GGG80	800/2	0864-03	FGS800-2	GS800-2	FGE80-2	FCD800	
	QT900-2	-	-	900/2	-	-	-	-	-	
	Grey cast iron									
	--	NO.60	GG40	--	0140	FGL400	--	--	--	
	HT350	NO.50	GG35	350	0135	FGL350	G35	FG35	FC350	
	HT300	NO.45	GG30	300	0130	FGL300	G30	FG30	FC300	
	HT250	NO.35	GG25	250	0125	FGL250	G25	FG25	FC250	
	HT200	NO.30	GG20	200	0120	FGL200	G20	FG20	FC200	
	HT150	NO.20	GG15	150	0115	FGL150	G15	FG15	FC150	
	HT100	--	-	100	0110	--	G10	--	FC100	



GENERAL TECHNICAL INFORMATION

Tolerance of fitting dimensions

Tolerance of fitting dimensions


Basic dimensions mm		Standard tolerance class																	
		IT1	IT2	IT3	IT4	IT5	IT6	IT7	IT8	IT9	IT10	IT11	IT12	IT13	IT14	IT15	IT16	IT17	IT18
Min(>)	Max(\$)	μm												mm					
---	3	0.8	1.2	2	3	4	6	10	14	25	40	60	0.1	0.14	0.25	0.4	0.6	1	1.4
3	6	1	1.5	2.5	4	5	8	12	18	30	48	75	0.12	0.18	0.3	0.48	0.75	1.2	1.8
6	10	1	1.5	2.5	4	6	9	15	22	36	58	90	0.15	0.22	0.36	0.58	0.9	1.5	2.2
10	18	1.2	2	3	5	8	11	18	27	43	70	110	0.18	0.27	0.43	0.7	1.1	1.8	2.7
18	30	1.5	2.5	4	6	9	13	21	33	52	84	130	0.21	0.33	0.52	0.84	1.3	2.1	3.3
30	50	1.5	2.5	4	7	11	16	25	39	62	100	160	0.25	0.39	0.62	1	1.6	2.5	3.9
50	80	2	3	5	8	13	19	30	46	74	120	190	0.3	0.46	0.74	1.2	1.9	3	4.6
80	120	2.5	4	6	10	15	22	35	54	87	140	220	0.35	0.54	0.87	1.4	2.2	3.5	5.4
120	180	3.5	5	8	12	18	25	40	63	100	160	250	0.4	0.63	1	1.6	2.5	4	6.3
180	250	4.5	7	10	14	20	29	46	72	115	185	290	0.46	0.72	1.15	1.85	2.9	4.6	7.2
250	315	6	8	12	16	23	32	52	81	130	210	320	0.52	0.81	1.3	2.1	3.2	5.2	8.1
315	400	7	9	13	18	25	36	57	89	140	230	360	0.57	0.89	1.4	2.3	3.6	5.7	8.9
400	500	8	10	15	20	27	40	63	97	155	250	400	0.63	0.97	1.55	2.5	4	6.3	9.7
500	630	9	11	16	22	32	44	70	110	175	280	440	0.7	1.1	1.75	2.8	4.4	7	11
630	800	10	13	18	25	36	50	80	125	200	320	500	0.8	1.25	2	3.2	5	8	12.5
800	1000	11	15	21	28	40	56	90	140	230	360	560	0.9	1.4	2.3	3.6	5.6	9	14
1000	1250	13	18	24	33	47	66	105	165	260	420	660	1.05	1.65	2.6	4.2	6.6	10.5	16.5
1250	1600	15	21	29	39	55	78	125	195	310	500	780	1.25	1.95	3.1	5	7.8	12.5	19.5
1600	2000	18	25	35	46	65	92	150	230	370	600	920	1.5	2.3	3.7	6	9.2	15	23
2000	2500	22	30	41	55	78	110	175	280	440	700	1100	1.75	2.8	4.4	7	11	17.5	28
2500	3150	26	36	50	68	96	135	210	330	540	860	1350	2.1	3.3	5.4	8.6	13.5	21	33

Note:


1. From IT1 to IT5, the standard tolerance with basic dimension more than 500 mm is on trial.

2. When the basic dimension ≤ 1 mm, the tolerances from IT4 to IT8 are invalid.

The shaft lower deviation(ei) and upper deviation (es) can be obtained by basic tolerance and standard tolerance (IT) of shaft.

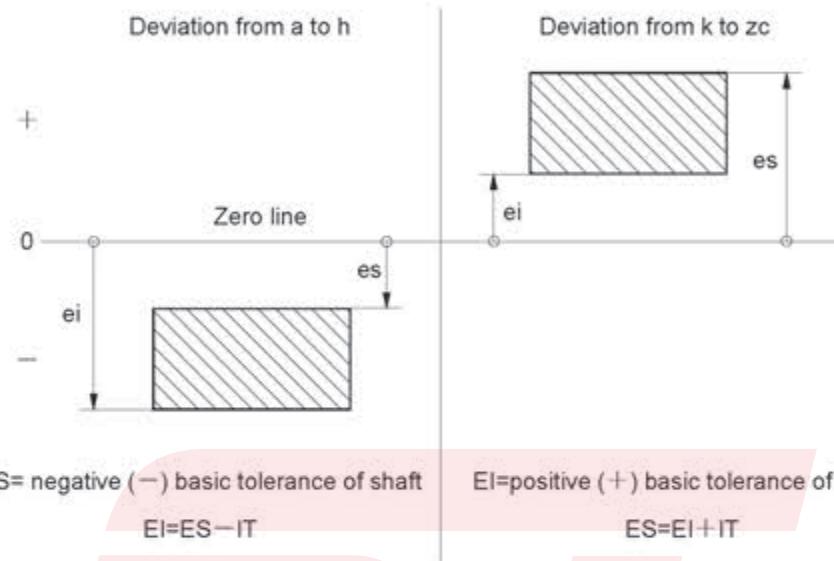

The hole lower deviation(EI) and upper deviation (ES) can be obtained by basic tolerance and standard tolerance (IT) of hole.

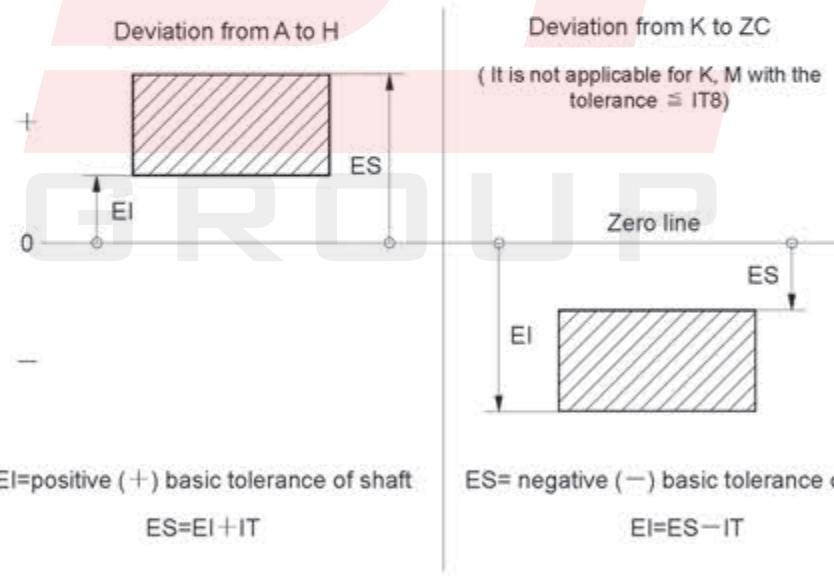

For example: for a hole with diameter 3 mm and tolerance H7, we can find that the lower deviation $EI=0$ in relation to H7 from the basic tolerance table, and the standard tolerance $IT=10\mu m$ corresponding to H7, thus the upper deviation $ES=EI+IT=10\mu m$. Therefore the hole fitting dimension is $\varnothing 3^{+0.01}_0$ mm.



GENERAL TECHNICAL INFORMATION

Tolerance of fitting dimensions

Basic deviations value of shaft

Dimensions (mm)		Basic deviation value												
		Upper deviation es												
		Standard tolerance class												
Min(>)	Max(s)	a	b	c	cd	d	e	ef	f	fg	g	h	js	
---	3	-270	-140	-60	-34	-20	-14	-10	-6	-4	-2	0		
3	6	-270	-140	-70	-46	-30	-20	-14	-10	-6	-4	0		
6	10	-280	-150	-80	-56	-40	-25	-18	-13	-8	-5	0		
10	14	-290	-150	-95		-50	-32		-16		-6	0		
14	18	-300	-160	-110		-65	-40		-20		-7	0		
18	24	-310	-170	-120		-80	-50		-25		-9	0		
24	30	-320	-180	-130		-100	-60		-30		-10	0		
30	40	-340	-190	-140		-120	-72		-36		-12	0		
40	50	-360	-200	-150		-145	-85		-43		-14	0		
50	65	-380	-220	-170		-170	-100		-50		-15	0		
65	80	-410	-240	-180		-190	-110		-56		-17	0		
80	100	-460	-260	-200		-210	-125		-62		-18	0		
100	120	-520	-280	-210		-230	-145		-68		-20	0		
120	140	-580	-310	-230		-260	-145		-76		-22	0		
140	160	-660	-340	-240		-290	-160		-80		-24	0		
160	180	-740	-380	-260		-320	-170		-86		-26	0		
180	200	-820	-420	-280		-350	-195		-98		-28	0		
200	225	-920	-480	-300		-390	-220		-110		-30	0		
225	250	-1050	-540	-330		-430	-240		-120		-32	0		
250	280	-1200	-600	-360		-480	-260		-130		-34	0		
280	315	-1350	-680	-400		-520	-290		-145		-36	0		
315	355	-1500	-760	-440		-560	-320		-160		-38	0		
355	400	-1650	-840	-480		-600	-350		-175		-40	0		
400	450	-1800	-920	-520		-640	-390		-190		-42	0		
450	500	-1950	-1000	-580		-680	-430		-205		-44	0		
500	560	-2100	-1120	-640		-720	-480		-220		-46	0		
560	630	-2250	-1250	-700		-760	-520		-235		-48	0		
630	710	-2400	-1400	-760		-800	-580		-250		-50	0		
710	800	-2550	-1500	-820		-840	-620		-265		-52	0		
800	900	-2700	-1600	-880		-880	-680		-280		-54	0		
900	1000	-2850	-1700	-940		-920	-720		-295		-56	0		
1000	1120	-3000	-1800	-1000		-980	-780		-310		-58	0		
1120	1250	-3150	-1950	-1120		-1040	-840		-325		-60	0		
1250	1400	-3300	-2100	-1250		-1100	-900		-340		-62	0		
1400	1600	-3450	-2250	-1350		-1160	-960		-355		-64	0		
1600	1800	-3600	-2400	-1500		-1220	-1020		-370		-66	0		
1800	2000	-3750	-2550	-1650		-1280	-1120		-385		-68	0		
2000	2240	-3900	-2700	-1800		-1340	-1200		-400		-70	0		
2240	2500	-4050	-2850	-1950		-1400	-1300		-415		-72	0		
2500	2800	-4200	-3000	-2100		-1460	-1260		-430		-74	0		
2800	3150	-4350	-3150	-2250		-1520	-1320		-445		-76	0		

In the formula Deviation = $\pm \frac{IT_n}{2}$, ITn is the IT value corresponding to 'n' .

Note: 1. If basic dimension ≤ 1 mm, the basic deviation a and b are not adopted.

2. Within the range from js7 to js11, if the value of ITn is odd number, then the final deviation = $\pm \frac{IT_n - 1}{2}$.

GENERAL TECHNICAL INFORMATION

Tolerance of fitting dimensions

µm

Basic deviation value																				
Lower deviation ei																				
IT5 IT6	IT7	IT8	IT4 IT7	< IT3 > IT7	Standard tolerance class															
					j	k	m	n	p	r	s	t	u	v	x	y	z	zn	zb	zc
-2	-4	-6	0	0	+2	+4	+6	+10	+14		+18		+20		+26	+32	+40	+60		
-2	-4		+1	0	+4	+8	+12	+15	+19		+23		+28		+35	+42	+50	+80		
-2	-5		+1	0	+6	+10	+15	+19	+23		+28		+34		+42	+52	+67	+97		
-3	-6		+1	0	+7	+12	+18	+23	+28		+33		+40		+50	+64	+90	+130		
											+39	+45		+60	+77	+108	+150			
-4	-8		+2	0	+8	+15	+22	+28	+35		+41	+47	+54	+63	+73	+98	+136	+188		
											+41	+48	+55	+64	+75	+88	+118	+160	+218	
-5	-10		+2	0	+9	+17	+26	+34	+43		+48	+60	+68	+80	+94	+112	+148	+200	+274	
											+54	+70	+81	+97	+114	+136	+180	+242	+325	
-7	-12		+2	0	+11	+20	+32			+41	+53	+66	+87	+102	+122	+144	+172	+226	+300	+405
										+43	+59	+75	+102	+120	+146	+174	+210	+274	+360	+480
-9	-15		+3	0	+13	+23	+37			+51	+71	+91	+124	+146	+178	+214	+258	+335	+445	+585
										+54	+79	+104	+144	+172	+210	+254	+310	+400	+525	+690
-11	-18		+3	0	+15	+27	+43			+63	+92	+122	+170	+202	+248	+300	+365	+470	+620	+800
										+65	+100	+134	+190	+228	+280	+340	+415	+535	+700	+900
										+68	+108	+146	+210	+252	+310	+380	+465	+600	+780	+1000
-13	-21		+4	0	+17	+31	+50			+77	+122	+166	+236	+284	+350	+425	+520	+670	+880	+1150
										+80	+130	+180	+258	+310	+385	+470	+575	+740	+960	+1250
										+84	+140	+196	+284	+340	+425	+520	+640	+820	+1050	+1350
-16	-26		+4	0	+20	+34	+56			+94	+158	+218	+315	+385	+475	+580	+710	+920	+1200	+1550
										+98	+170	+240	+350	+425	+525	+650	+790	+1000	+1300	+1700
-18	-28		+4	0	+21	+37	+62			+108	+190	+268	+390	+475	+590	+730	+900	+1150	+1500	+1900
										+114	+208	+294	+435	+530	+660	+820	+1000	+1300	+1650	+2100
-20	-32		+5	0	+23	+40	+68			+126	+232	+330	+490	+595	+740	+920	+1100	+1450	+1850	+2400
										+132	+252	+360	+540	+660	+820	+1000	+1250	+1600	+2100	+2600
				0	0	+26	+44	+78		+150	+280	+400	+600							
				0	0	+30	+50	+88		+155	+310	+450	+660							
				0	0	+34	+56	+100		+175	+340	+500	+740							
				0	0	+40	+66	+120		+185	+380	+560	+840							
				0	0	+48	+78	+140		+210	+430	+620	+940							
				0	0	+58	+92	+170		+220	+470	+680	+1050							
				0	0	+68	+110	+195		+250	+520	+780	+1150							
				0	0	+76	+135	+240		+300	+640	+960	+1450							
										+330	+720	+1050	+1600							
										+370	+820	+1200	+1850							
										+400	+920	+1350	+2000							
										+440	+1000	+1500	+2300							
										+460	+1100	+1650	+2500							
										+550	+1250	+1900	+2900							
										+580	+1400	+2100	+3200							



GENERAL TECHNICAL INFORMATION

Tolerance of fitting dimensions

Basic deviations value of hole

Dimensions (mm)	Basic deviation value																		
	Lower deviation EI										Upper deviation ES								
	Standard tolerance class										IT6	IT7	IT8	<IT8	>IT8	<IT8			
Min(>) Max(<)	A	B	C	CD	D	E	EF	F	FG	G	H	JS	J	K	M	N	P to ZC		
---	+270	+140	+60	+34	+20	+14	+10	+6	+4	+2	0	+2	+4	+6	0	-2	-2	-4	-4
3	+270	+140	+70	+46	+30	+20	+14	+10	+6	+4	0	+5	+6	+10	-1+Δ	-4+Δ	-4	-8+Δ	0
6	+280	+150	+80	+56	+40	+25	+18	+13	+8	+5	0	+5	+8	+12	-1+Δ	-6+Δ	-6	-10+Δ	0
10	+290	+150	+95	+60	+32	+16		+6		0	+6	+10	+15	-1+Δ	-7+Δ	-7	-12+Δ	0	
14	+300	+160	+110	+65	+40	+20		+7		0	+8	+12	+20	-2+Δ	-8+Δ	-8	-15+Δ	0	
18	+310	+170	+120	+80	+50	+25		+9		0	+10	+14	+24	-2+Δ	-9+Δ	-9	-17+Δ	0	
24	+320	+180	+130	+80	+60	+30		+10		0	+13	+18	+28	-2+Δ	-11+Δ	-11	-20+Δ	0	
30	+340	+190	+140	+100	+60	+30		+10		0	+16	+22	+34	-3+Δ	-13+Δ	-13	-23+Δ	0	
40	+360	+200	+150	+120	+72	+36		+12		0	+18	+26	+41	-3+Δ	-15+Δ	-15	-27+Δ	0	
65	+380	+220	+170	+120	+72	+36		+12		0	+22	+30	+47	-4+Δ	-17+Δ	-17	-31+Δ	0	
100	+410	+240	+180	+145	+85	+43		+14		0	+25	+36	+55	-4+Δ	-20+Δ	-20	-34+Δ	0	
120	+460	+260	+200	+170	+100	+50		+15		0	+29	+39	+60	-4+Δ	-21+Δ	-21	-37+Δ	0	
140	+520	+280	+210	+190	+110	+56		+17		0	+33	+43	+66	-5+Δ	-23+Δ	-23	-40+Δ	0	
160	+580	+310	+230	+210	+125	+62		+18		0			0		-26	-44			
180	+660	+340	+240	+210	+135	+68		+20		0			0		-30	-50			
200	+740	+380	+260	+230	+150	+76		+22		0			0		-34	-56			
225	+820	+420	+280	+230	+170	+80		+24		0			0		-40	-66			
260	+920	+480	+300	+230	+190	+96		+26		0			0		-48	-78			
280	+1050	+540	+330	+260	+210	+125		+18		0			0		-58	-92			
315	+1200	+600	+360	+280	+230	+155		+20		0			0		-68	-110			
355	+1350	+680	+400	+300	+260	+185		+22		0			0		-76	-135			
400	+1500	+760	+440	+330	+290	+210		+24		0									
450	+1650	+840	+480	+360	+320	+240		+26		0									
500	+560			+260	+145	+76		+22		0									
560	+630			+290	+160	+80		+24		0									
630	+710			+320	+170	+86		+26		0									
710	+800			+350	+195	+98		+28		0									
800	+900			+390	+220	+110		+30		0									
900	+1000			+430	+240	+120		+32		0									
1000	+1120			+480	+260	+130		+34		0									
1120	+1250			+520	+290	+145		+38		0									
1250	+1400			+560	+320	+160		+40		0									
1400	+1600			+600	+350	+180		+42		0									
1600	+1800			+640	+380	+198		+44		0									
1800	+2000			+680	+410	+210		+46		0									
2000	+2240			+720	+440	+220		+48		0									
2240	+2500			+760	+470	+230		+50		0									
2500	+2800			+800	+500	+240		+52		0									
2800	+3150			+840	+530	+250		+54		0									

In the formula Deviation = $\pm \frac{IT_n-1}{2}$, ITn is the IT value corresponding to 'n'.

If IT \geq IT7, add a Δ value to the relevant value

Note: 1. If basic dimension ≤ 1 mm, the basic deviation A and B are not adopted, so is the N when IT \geq IT8.

2. Within the range from JS7 to JS11, if the value of ITn is odd number, then the final deviation = $\pm \frac{IT_n-1}{2}$.

3. Regarding to the K, M, N with IT \geq IT8 or the P to ZC with IT \geq IT7, the Δ value can be selected from the right-side sheet.

For example: within the range 8~30mm of K7, $\Delta=8\mu m$, therefore $ES=-2+8=+6\mu m$ within the range 18~30mm of S6, $\Delta=4\mu m$, therefore $ES=-35+4=-31\mu m$.

4. Special cases: within the range 250~315mm of M5, $ES=9\mu m$ (instead $-11\mu m$).

GENERAL TECHNICAL INFORMATION

Tolerance of fitting dimensions

μm

Basic deviation value												△						
Upper deviation ES																		
Standard tolerance class >IT7												Standard tolerance class						
P	R	S	T	U	V	X	Y	Z	ZA	ZB	ZC	IT3	IT4	IT5	IT6	IT7	IT8	
-6	-10	-14		-18		-20		-26	-32	-40	-60	0	0	0	0	0	0	
-12	-15	-19		-23		-28		-35	-42	-50	-80	1	1.5	1	3	4	6	
-15	-19	-23		-28		-34		-42	-52	-67	-97	1	1.5	2	3	6	7	
-18	-23	-28		-33		-40		-50	-64	-90	-130	1	2	3	3	7	9	
				-39	-45			-60	-77	-108	-150							
-22	-28	-35		-41	-47	-54	-63	-73	-98	-136	-188	1.5	2	3	4	8	12	
				-41	-48	-55	-64	-75	-88	-118	-160	-218						
-26	-34	-43		-48	-60	-68	-80	-94	-112	-148	-200	-274	1.5	3	4	5	9	14
				-54	-70	-81	-97	-114	-136	-180	-242	-325						
-32	-41	-53	-66	-87	-102	-122	-144	-172	-226	-300	-405	2	3	5	6	11	16	
				-43	-59	-75	-102	-120	-146	-174	-210	-274	-360	-480				
-37	-51	-71	-91	-124	-146	-178	-214	-258	-335	-445	-585	2	4	5	7	13	19	
				-54	-79	-104	-144	-172	-210	-254	-310	-400	-525	-690				
-43	-63	-92	-122	-170	-202	-248	-300	-365	-470	-620	-800	3	4	6	7	15	23	
				-65	-100	-134	-190	-228	-280	-340	-415	-535	-700	-900				
-48	-68	-108	-146	-210	-252	-310	-380	-465	-600	-780	-1000							
-50	-77	-122	-166	-236	-284	-350	-425	-520	-670	-880	-1150	3	4	6	9	17	26	
	-80	-130	-180	-258	-310	-385	-470	-575	-740	-960	-1250							
-54	-84	-140	-196	-284	-340	-425	-520	-640	-820	-1050	-1350							
-56	-94	-158	-218	-315	-385	-475	-580	-710	-920	-1200	-1550	4	4	7	9	20	29	
	-98	-170	-240	-350	-425	-525	-650	-790	-1000	-1300	-1700							
-62	-108	-190	-268	-390	-475	-590	-730	-900	-1150	-1500	-1900	4	5	7	11	21	32	
	-114	-208	-294	-435	-530	-660	-820	-1000	-1300	-1650	-2100							
-68	-126	-232	-330	-490	-595	-740	-920	-1100	-1450	-1850	-2400	5	5	7	13	23	34	
	-132	-252	-360	-540	-660	-820	-1000	-1250	-1600	-2100	-2600							
-78	-150	-280	-400	-600														
	-155	-310	-450	-660														
-88	-175	-340	-500	-740														
	-185	-380	-560	-840														
100	-210	-430	-620	-940														
	-220	-470	-680	-1050														
-120	-250	-520	-780	-1150														
	-260	-580	-840	-1300														
-140	-300	-640	-960	-1450														
	-330	-720	-1050	-1600														
-170	-370	-820	-1200	-1850														
	-400	-920	-1350	-2000														
-195	-440	-1000	-1500	-2300														
	-460	-1100	-1650	-2500														
-240	-550	-1250	-1900	-2900														
	-580	-1400	-2100	-3200														



GENERAL TECHNICAL INFORMATION

Hardness reference table

Hardness reference table(conversion of hardness and strength for ferrous metal)

Hardness				Tensile strength N/mm ²	Hardness				Tensile strength N/mm ²
Rockwell hardness		Vickers hardness	Brinell hardness		Rockwell hardness		Vickers hardness	Brinell hardness	
HRC	HRA	HV	HB		HRC	HRA	HV	HB	
70.0	86.6	1037	—	—	51.0	76.3	525	501	1780
69.5	86.3	1017	—	—	50.5	76.1	517	494	1750
69.0	86.1	997	—	—	50.0	75.8	509	488	1720
68.5	85.8	978	—	—	49.5	75.5	501	481	1690
68.0	85.5	959	—	—	49.0	75.3	493	474	1660
67.5	85.2	941	—	—	48.5	75.0	485	468	1630
67.0	85.0	923	—	—	48.0	74.7	478	461	1605
66.5	84.7	906	—	—	47.5	74.5	470	455	1575
66.0	84.4	889	—	—	47.0	74.2	463	449	1550
65.5	84.1	872	—	—	46.5	73.9	456	442	1525
65.0	83.9	856	—	—	46.0	73.7	449	436	1500
64.5	83.6	840	—	—	45.5	73.4	443	430	1475
64.0	83.3	825	—	—	45.0	73.2	436	424	1450
63.5	83.1	810	—	—	44.5	72.9	429	418	1430
63.0	82.8	795	—	—	44.0	72.6	423	413	1405
62.5	82.5	780	—	—	43.5	72.4	417	407	1385
62.0	82.2	766	—	—	43.0	72.1	411	401	1360
61.5	82.0	752	—	—	42.5	71.8	405	396	1340
61.0	81.7	739	—	—	42.0	71.6	399	391	1320
60.5	81.4	726	—	—	41.5	71.3	393	385	1300
60.0	81.2	713	—	2555	41.0	71.1	388	380	1280
59.5	80.9	700	—	2500	40.0	70.8	382	375	1260
59.0	80.6	688	—	2450	40.0	70.5	377	370	1245
58.5	80.3	676	—	2395	39.5	70.3	372	365	1225
58.0	80.1	664	—	2345	39.0	70.0	367	360	1210
57.5	79.8	653	—	2295	38.5	—	362	355	1190
57.0	79.5	642	—	2250	38.0	—	357	350	1175
56.5	79.3	631	—	2205	37.5	—	352	345	1160
56.0	79.0	620	—	2160	37.0	—	347	341	1140
55.5	78.7	609	—	2115	36.5	—	342	336	1125
55.0	78.5	599	—	2075	36.0	—	338	332	1110
54.5	78.2	589	—	2035	35.5	—	333	327	1095
54.0	77.9	579	—	1995	35.0	—	329	323	1080
53.5	77.7	570	—	1955	34.5	—	324	318	1065
53.0	77.4	561	—	1920	34.0	—	320	314	1050
52.5	77.1	551	—	1885	33.5	—	316	310	1035
52.0	76.9	543	—	1850	33.0	—	312	306	1020
51.5	76.6	534	—	1815	32.5	—	308	302	1010

GENERAL TECHNICAL INFORMATION

Hardness reference table

Hardness				Tensile strength N/mm ²	Hardness				Tensile strength N/mm ²
Rockwell hardness		Vickers hardness	Brinell hardness		Rockwell hardness		Vickers hardness	Brinell hardness	
HRC	HRA	HV	HB		HRC	HRA	HV	HB	
32.0	—	304	298	995	24.0	—	249	245	820
31.5	—	300	294	980	23.5	—	246	242	810
31.0	—	296	291	970	23.0	—	243	240	800
30.5	—	292	287	960	22.5	—	240	237	790
30.0	—	289	283	950	22.0	—	237	234	785
29.5	—	285	280	935	21.5	—	234	232	775
29.0	—	281	276	920	21.0	—	231	229	765
28.5	—	278	273	910	20.5	—	229	227	760
28.0	—	274	269	900	20.0	—	226	225	750
27.5	—	271	266	890	19.5	—	223	222	745
27.0	—	268	263	880	19.0	—	221	220	735
26.5	—	264	260	870	18.5	—	218	218	730
26.0	—	261	257	860	18.0	—	216	216	725
25.5	—	258	254	850	17.5	—	214	214	715
25.0	—	255	251	835	17.0	—	211	211	710
24.5	—	252	248	830					

Note: The conversion values for steel in the table are commonly applicable for the steels with low and high carbon content.

The tensile strength in the table are applicable for the steels without high conversion precision requirement 1N/mm²=1Mpa.

This table is selected from GB1172-74.

GROUP



GENERAL TECHNICAL INFORMATION

Grades comparison table

CVD coating grades

	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR
Application	P01	GC4305 GC4205	GC4315 NC310 NC3015	GC4215 GC4325 GC4225	TT8115	WPP01 WPP05 WPP05S	UE6105	AC810P AC700G	T9105	CA510 CA5505	JC110V	HB8010	KCP05B KCP05 KC9105	TP0501 TP0500 TP1501 TP1500	IC9150 IC8150 IC428
P10	YBC103 YBC152 YBC151	GC4315 GC4215 GC4325	NC310 NC3015	TT8115	WPP05 WPP10 WAK20 WPP05S WPP10S	UE6105 MC6015 UE6110 MY5015	AC8015P AC810P AC700G AC820P AC2000	T9105 T9115	CA510 CA5505 CA515 CA5515 CA025P	JC110V JC215V	HB8010 HG8025 GM8020	KCP10B KCP10 KCP25 KC9110	TP1501 TP1500 TP2500 TP2500	IC9150 IC8150 IC8250	
P20	YBC203 YBC251 YBC252	GC4315 GC4215 GC4325 GC4225	NC3020	TT8125 TT5100	WPP20 WPP20S	MC6016 UE6110 MC6025 UE6020 MY5015	AC820P AC2000 AC8025P AC830P	T9115 T9125	CA515 CA5515 CA525 CA5525 CR8025P	JC110V JC215V	HB8025 GM8020 GM25	KCP25B KCP30B KC9125	TP2501 TP2500	IC8250 IC8250 IC8350	
P30	YBC252 YBC351 YBC352	GC4335 GC4225 GC4025 GC4235	NC330	TT8125 TT5100 TT8135	WPP30 WAK30 WPP30S	MC6025 UE6020 MC6035 UE6035 UH6400	AC8030P AC830P AC630M	T9125 T9135	CA525 CA530 CA535 CR8025	JC325V JC215V	GM25 GM8035	KCP30B KCP30	TP3501 TP3500 TP3000	IC8350 IC9250 IC9350	
P40	YBC351 YBC352	GC4335 GC4235	GC2015	TT7100 TT8135	WPP30 WAK30 WPP30S	MC6035 UE6035 UH6400	AC8035P AC630M	T9135 T9130	CA530 CA5535	JC325V	GM8035 GX30	KCP40B KCP40 KC9140 KC9240	TP3501 TP3500 TP3000	IC8350	
M10		GC2220		TT9215		MC7015 US7020	AC610M AC6020M	T9115	CA6515	JX605X JC110V		KCM115B KCM15	TM2000	IC8015 IC8250	
M20	YBM151 YBM153	GC2220 GC2015	NC9020	TT9215 TT9225		MC7015 US7020 MC7025	AC6020M AC610M AC6030M AC630M	T6120 T9125	CA6515 CA6525	JC110V	HB8025 GM25	KCM15 KC9225 KCM25B	TM2000	IC8015	
M30	YBM151 YBM251	GC2025	NC330	TT9225 TT9235		MC7025 US7335	AC6030M AC630M	T6130	CA6525	JX525X	GM8035 GX30	KCM35B KCM35	TM4000	IC8025	
M40	YBM253	GC2025		TT9235		US735				JX525X	GX30	KCM35B KCM240 KC9245	TM4000	IC8025	
K01	YBD052	GC3205 GC3210				WAK10 WPP01	MC5005 UC5015	T5105	CA4505 CA410K	JC050W CA4010 CA310	HX3505	KCK05B KCK05	TK0501 TH1500	IC8005	
K10	YBD102	GC3205 GC3210	N305K	TT7005		WPP10 WAK10 WKK10S	MC5015 UC5115 MY5015	T5105 T5115	CA4515 CA410K CA415K CA420K AC700G AC820P	JC108W JC050W JC105V JC110V	HX3515 HG8010	KCK15B KCK15 KC9315 KCK20B	TK0501 TH1501	IC8005 IC8010 IC428	
K20	YBD152 YBD252	GC3225 GC3215	N315K	TT7310		WAK30 WAK20 WKK20S	MC5015 UC5115 UE6110 MY5015	T515 T5115 T5125	CA320 CA4515 CA4115 CA4120	JC108W JC110V JC215V	HG8025 GM8020	KCK20B KCK20 KC9325 KC9P05	TK1501	IC8150	
K30		GC3225				WAK30 WKP30S	UE6110	AC820P	T9115 T5125		JC215	HG8025 GM8020	KCPK05		
S01	S05F							US905				HS9105 HS9115			

GENERAL TECHNICAL INFORMATION

Grades comparison table

CVD coating grades

Application	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR
P10															
P20	YBC301 YBM251	GC4220													
P30	YBM351	GC4230	NCM335	TT7800	WKP25 WKP35 WKP35S	F7030 MC7020	ACP100	T3225		JC730U				MP1500	IC9080 IC4100 IC9015
P40	YBC302	GC4240													MP1500 MP2500
M10															IC8250
M20	YBM251 YBM253														
M30	YBC302	GC2040	NCM335	TT7800		F7030 MC7020	ACP100	T3225		CA6535	JC730U				MP2500 MM4500
M40	YBM351														IC9350 IC4050
K01															IC635
K10	YBD152		NCM310	TT6800	WKP15 WKP25	MC5020	ACK100	T1215 T1115	CA420M	JC600					
K20	YBD203 YBD252	GC3220 GC3330 K20W	NCM320	TT6800	WKP15 WKP25 WKP35 WKP35S	MC5020	ACK200	T1215		JC610					IC5100 IC9150
K30	YBD252	GC3330 GC3040								JC610	GX30				IC4100 IC4050 IC520M



GENERAL TECHNICAL INFORMATION

Grades comparison table

PVD coating grades

Application	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR
	P01						WXN10			PR1005					
P10	YBG102	GC1125					WSM10 WSM21	VP10MF MS6015		AH710	PR1005 PR930 PR1025 PR115 PR1225 PR1425		KCU10 KC5010 KC5510 KU10T	CP200 TS2000	IC250 IC507 IC570 IC807 IC907 IC908
P20	YBG202	GC1125 GC15	PC230	TT9030	WSM21 WSM20		VP10RT VP20RT VP15TF VP20MF MS6015	AC520U	AH120 AH730 AH725 SH725 SH730 J740	PR930 PR1025 PR1115 PR1225 PR1425 PR1535	IP2000	KCU10 KC5025 KC5525 KU25T	TS2500	IC1007 IC250 IC308 IC507 IC807 IC808 IC907 IC908 IC1008 IC1028 IC3028	
P30	YBG202	GC1125		TT9030 TT8020	WSM30		VP10RT VP20RT VP15TF VP20MF	AC1030U AC530U	AH725 AH120 AH730 SH730 GH330 GH725 J740 SH725	PR1025 PR1225 PR1425 PR1535 PR1625	IP3000	KCU25 KC5525 KU25T	CP500	IC228 IC250 IC328 IC330 IC354 IC528 IC1008 IC1028 IC3028	
P40			PC240	TT8020					AH120 AH725 AH645	PR1535			CP500 CP800	IC228 IC328 IC528 IC928 IC1008 IC1028 IC3028	
M10	YBG202 YBG205	GC1115 GC15 GC1105			WSM10 WSM10S	VP10MF MS6015		AH630	PR1025 PR1225 PR1425	JC5003 JC8015	IP050S	KCU10 KC5010 KC5510	CP200 TS2000	IC354 IC507 IC520 IC807 IC907 IC1007 IC5080T	
M20	YBG202 YBG205	GC1115 GC15 GC1125	PC9030	TT9030 TT8010	WSM20 WSM21 WSM20S	VP10RT VP20RT VP15TF VP20MF	AC520U	AH725 AH120 SH730 AH630 SH725	PR1025 PR1125 PR1225 PR1425 PR915 PR930 PR1535	JC5003 JC5015 JC8015 JC5118	IP100S	KCU10 KC5010 KC5510	TS2500 CP500	IC354 IC808 IC908 IC1008 IC1028 IC3028 IC5080T	
M30		GC1125 GC2035	PC9030	TT8020	WSM30 WSM30S		VP10RT VP20RT VP15TF VP20MF MP7035	AC520U AC530U AC1030U AC6040U	AH725 AH120 SH730 J740 AH645 SH725	PR1125 PR1425 PR1535	JC5015 JC8015 JC5118	KCU25 KC5525 KU25T	CP500 CP800	IC228 IC250 IC328 IC330 IC1008 IC1028 IC9080T	
M40		GC2035						MP7035	AC530U AC6040U	AH645	PR1535	JC5118			IC328 IC928 IC1008 IC1028 IC3028 IC9080T

GENERAL TECHNICAL INFORMATION

Grades comparison table

PVD coating grades		ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENAMETAL	SECO	ISCAR
Application																
K	K01								AH110							
	K10	GC15	PC205K	TT9030					GH110 AH110	AC510U				KCU10 KC5010 KC5510	CP200 TS2000	IC350 IC910 IC1008
K	K20		PC215K	TT9030					AH120					KCU15 KC025	CP200 TS2000 TS2500	IC228 IC350 IC808 IC830 IC908 IC1007 IC1008
	K30								AH120 GH130	VP10RT VP20RT VP15TF				KCU25 KC5525 KC025T	CPS00	IC228 IC350 IC808 IC830 IC908 IC1007 IC1008
S	S01								AH8005	MP9005 VP05RT				JP9105	TH1000	IC507 IC807 IC903 IC806 IC5080T
	S10	YBG102 YBG105 YBG102	GC1105 GC15	TT8010	WSM10 WSM10S				MP9005 MP9015 VP10RT	AC510U	AH8005 AH8015			JC5003 JC5015 JC8015	CP200 CP250 TS2000 TS2050 TS2500 TH1000	IC228 IC300 IC328 IC808 IC908 IC928 IC3028 IC806 IC9080T
S	S20	YBG212	GC1125	TT8020	WSM20 WSM21				WSM20 MT9015	AC510U AC520U	AH8015			JC5015 JC8015 JC5118	TS2500 CPS00	IC928 IC830
	S30		GC1125						WSM30 WSM30S	VP15TF MP9025 VP20RT	AC1030U	AH630 AH7025		JC5118	KC5525	CP600



GENERAL TECHNICAL INFORMATION

• Grades comparison table

PVD coating grades

ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR	
Application															
P01	YBH053				TT2510 TT5505					AH110 AH710		JC8003	ATH80D PN208 JP4105 PN15M	IC903	
P10	YBG252	GC1010 GC1130			TT2510 TT5505 TT5515 TT7080	WXH15 WXM15				AH120 AH725		JC8003 JC8015 JC5015 JC5118	KC505M KC715M KC510M KC515M	IC250 IC350 IC808 IC810 IC903 IC908 IC910 IC950	
P20	YBG205 YBG202 YBG9320 YBG252	GC1010 GC1030 GC1130 GC2030	GC1010 GC1030 GC1130 GC2030	PC230	TT2510 TT5505 TT5525 TT7080 TT9030 TT9080	WHH15 WXM15	MP6120 VP15TF	ACP200		AH725 AH125 AH3135 AH9030		JC5015 JC5040 JC6235 JC8018 JC5118 JC6235 JC7560P JC8118P	CY9020 JP4120 CY150 KC620M KC635M KC715M KC720M KC730M KTPK20	IC250 IC328 IC330 IC350 IC808 IC810 IC830 IC900 IC908 IC910 IC928 IC950 IC1008	
P															
P30	YBG302	GC1010 GC1030 GC1130 GC2030	GC1010 GC1030 GC1130 GC2030	PC3530 PC130	TT5525 TT7080 TT8020 TT8080 TT9030 TT9080	WSP45 WSP46	MP6120 VP15TF MP6130 VP30RT	ACP200 ACP300		AH725 AH120 AH130 AH3135 AH9030		JC6235 JC7560 JC8050 JC7560P JC5015 JC8118 JC8118P JC8015 JC5118	JJS4045 CY250 CY250V CY25 HC844	KC735M KC725M KC530M KC537M KCPM40	IC250 IC328 IC330 IC350 IC830 IC845 IC900 IC928 IC950 IC1008
P40	YBG302	GC1030 GC1130 GC2030													

Milling

GENERAL TECHNICAL INFORMATION

Grades comparison table

Application	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR
	M01														IC907
	M10	YG252	GC1025 GC1130 GC1030 GC1010	TT5525 TT9030 TT9080	WXXM15	ACM100	AH725	PR1225			PN08M PN208	PN15M PN215	KC735M KC515M		IC903
	M20	YBG205 YBG202 YBG9320 YBG252	GC1025 GC1030 GC1040 GC2030 S30T	TT8020 TT8080	WXXM15 WSM35 WSM36	ACP200	AH725 AH130 AH6030 AH3135	PR1025	PR1225	JC5015 JC5118 JC8015	JP4120		KC610M KC5635M KC730M KC720M KC522M KC525M KCPM40 KCPK20	IC250 IC300 IC808 IC830 IC908 IC928 IC1008	
	M														IC250
	M30	YBG302	S30T GC1040 GC2030	PC9530	TT8020 TT8080	WSM35 WSM36 WSP45 WSP46	ACP200 ACP300 ACM300	AH130 AH3135	PR1225 PR1525 PR1535	JC5015 JC7560 JC7560P JC8050 JC8118 JC8118P	JS4045 CY250 HC844		KC537M KC725M KCPM40 KC530M	IC300 IC328 IC330 IC830 IC908 IC380 IC882	
	M40														IC250 IC300 IC328 C330 IC1008 IC882
															F40M

PVD coating grades

Milling



GENERAL TECHNICAL INFORMATION

Grades comparison table

PVD coating grades

Application	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR	
	K01				TT6080		MP8010		AH110		JC8003	ATH80D ATH08M TH308				
	K10	YBG102 YBG52	GC1010	PC205K	TT6080	WHH15 WXM15 WKK25	MP8010		AH110 AH120	PR1210 PR1510	JC8015	ATH10E TH315 CY100H	KC514M KC515M KC527M KC635M	MK2050		
K	K20	YBG152	GC1010 GC1020	PC215K		WHH15 WXM15 WKK25	VP15TF VP20RT	ACK300	AH120 AH9030	PR1210 PR1510	JC8015 JC6235	CY150 JP4120 CY9020 PTH13S	KTPK20 KC514M KC610M KC620M KC524M	MK2000 MK2050		
	K30		GC1020			WKK25	VP15TF VP20RT	ACK300	AH120		JC6235	CY250 JS4045	KC522M KC524M KC725M KC735M KC537M	MK2050		
	S01								AH110 AH710	PR1210	JC8003 JC8015 JC5118	PN08M PN208			IC907 IC908 IC808 IC903	
	S10	YBG202	GC1130 GC1010 GC1030 GC2030		TT9030 TT9080 TT8080	MP9120 VP15TF	EH520Z EH202 ACM100	AH120 AH725		PR1210	JC8003 JC8015 JC5118 JC5015	JS1025 JP4120	KC510M	MS2050		
S	S20		S30T GC2030 GC1030 GC1130		TT8020 TT8080	WSM35 WSM36	MP9120 VP15TF MP9130 MP9030	AH725 AH130 AH6030		PR1535	JC8050 JC8015 JC5118 JC5015	PTH30H	KC522M KC525M KCSM30 KCPM40	MS2050		
	S30		GC2030 GC1040		TT8020	WSM35 WSM36 WSP45 WSP46	ACM300 ACP300	AH130		PR1535	JC8050 JC7560 JC5118	JM4160	KC725M KCPM40	MS2050 F40M KCSM40		
	H01				TT2510 TT5505		MP8010 VP05HT		AH110		JC8003 DH103 JC8008 DH102	JP4105 DH308 TH303 PTH08M ATH08D			IC903	
	H10		GC1130 GC1010 GC1030		TT5515 TT6080	WHH15	VP15TF VP10H		AH120		JC8003 JC8015 JC5118 JC8118P	JP4105 TH308 TH303 PTH08M ATH08D	KC505M KC510M	MH1000 F15M		
H	H20		GC1030 GC1130		TT5515 TT6080	WHH15	VP15TF		AH120 AH725 AH6030		JC8015 JC5118 JC8118P	JP4115 TH315		F15M		
	H30												JP4120	MP3000 F30M		

GENERAL TECHNICAL INFORMATION

Grades comparison table

Cermet grades		ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR
Application	ISO Code														
	P01			CC105 CN100	PV3010 CT3000		AP25N* VP25N*	T110A T1000A	NS520	TN30 TN610 PV710* PV30* TN6010 PV7010*	LN10 CX50				IC20N IC520N*
	P10	YNG151 YNG151C	CT5015 GC1525*	CC15 CN200 CT10	PV3010 CT3000	WCE 10	NX2525 AP25N* VP25N*	T1200A T2000Z* T1500A T1500Z*	GT9530* J9530	TN60 TN610 PV710* PV60* TN6010 PV7010*	CX50 CX75 PX75*	KT315 KT125	TP1020 TP1030* CM CMP*	IC20N IC520N* IC530N*	
P	P20	GC1525*			PV3010 CT3000	WCE 10	NX2525 AP25N* VP25N*	T1200A T2500A T2000Z* T3000Z*	GT9530* NS9530 J9530	TN60 PV60* TN620 PV720* TN6020 PV7020* PV7025*	CX75 PX75* PX90*	KT325 KT1120 KT5020*	TP1020 TP1030*	IC20N IC30N IC530N*	
	P30						MP3025*	T3000Z* VP45N*	NS520	PV7025* PV90*	PX90*			IC75T	
	M10	YNG151 YNG151C	GC1525*		PV3010 CT3000		NX2525 AP25N VP25N	T110A T1000A T2000Z T1500Z	NS520	TN60 PV60* TN620 PV720* TN6020 PV7020*	LN10 CX50	KT125	TP1020 TP1030* CM CMP*		
	M20				PV3010 CT3000		NX2525 AP25N* VP25N*	T1200A T2000Z T1500A T1500Z	GT9530* NS9530 J9530	TN90 TN6020 TN620 PV720* PV90* PV7020* PV7025*	CX50 CX75 PX75	CH550			
	M30								NS520						
	M40														
	K01			CC105 CN100	PV3010 CT3000		NX2525 AP25N*	T110A T1000A T2000Z* T1500Z*	NS520	TN30 PV30* PV7005* TN610 PV710* TN6010 PV7010*	LN10				
K	K10	YNG151 YNG151C	CT5015	CC115	CT3000		NX2525 AP25N*	T1200A T2000Z* T1500A T1500Z*	GT9530* NS9530 J9530	TN60 PV60* TN6020 TN620 PV720* PV7020* PV7025*	LN10	KT325 KT125			
	K20						NX2525 AP25N*	T3000Z*	NS520	CX75					
	K30														



GENERAL TECHNICAL INFORMATION

Grades comparison table

Cermet grades

Application	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR
P01						CT3000									
P10	YNG151 YNG151C		CN100	CT3000 CT7000		NX2525				NS740	TN60	CX75	MZ1000*		C15M IC30N
P20		CT530	CN20	CT3000 CT7000		NX2525 MX3020	T250A	NS740		TN100M TN60	CX75 CX90	CH550 CH7030	KT530M HT7 KT605M	C15M MP1020	IC30N
P30			CN30	CT7000		MX3030 NX4545	T250A T4500A						MZ1000*		
M01										CX90 CX99 CH7035					
M10	YNG151 YNG151C			CT3000 CT7000		NX2525		NS740		TN60					IC30N
M20		CT530		CT7000		NX2525 MX3020		NS740		TN100M	CX75	CH550 CH7030	KT530M HT7 KT605M	C15M IC30N	
M30						MX3030 NX4545	T250A						MZ1000*		
M40										CX90 CX99 CH7035					
K01										TN60					
K10	YNG151 YNG151C									NS740					
K20										NX2525					
K30											CX75				

Milling

GENERAL TECHNICAL INFORMATION

Grades comparison table

PCBN grades

Application	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	SECO	Element Six
H01							WCB30	BNC100 BNX10 BN1000	BXM10 BX310	KBN050M KBN10M KBN510			CBN060K
H10	YCB012	CB7015	KB320 KB330 KB420	KB50 TB650			WCB30 WCB50	BNC110 MBC010 MB810	BXM10 BNX20 BN2000	KBN25M KBN525	JBN300	CBN010	DBC50
H								MBC020 BC8120 BC8020 MB825 MB8025	BXM10 BX330 BX530				
H20		CB7025 CB20		TB650			WCB50 WCB80	MBC020 BC8120 BC8020 MB8025	BXA20 BNX25 BN250	KBN30M	JBN245	CBN150 CBN160C	DBN45
H30		CB7525						BC8130 MB835	BNC300 BN350	BXC50 BX380	KBN35M		CBN150 CBN160C
S	S01								BN700 BN7000	M714B			CBN170
K01				KB90			WCB90	MB710 BN500 BNC500	BX930 BX910 BX870				
K10	YCB011 YZB221	CB7525	KB350 KB360	KB90A			WCB50 WCB80	MB730 BN700 BN7500 MB4020	BX470 BX480 BX950	KBN60M	JBN795		DBA80
K	K20	YZB221					WCB80	MB730 BN700 BN7000 MB4020	BXC90 BX90S	KBN60M	JBN500	CBN200	
K30		CB7925						BC5030 MBS140	BNS800	BX90S BX90	KBN900		CBN300 CBN400C CBN500

PCD grades

Application	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	SECO	Element Six
N01		CD05					WCD10	MD205	DA90	DX180 DX160	KPD001	JDA30 JDA735	PCD05 CTH025
N10	YCD011	CD10	DP90 DP150 DP200	KP500	WCD10		MD220	DA150	DX140	KPD010		PCD10 CTB010	
N	N20							MD220	DA2200	DX120		JDA15	PCD20 CTB002
N30								MD230	DA1000	DX110	KPD230	JDA10	PCD30 PCD30M



GENERAL TECHNICAL INFORMATION

Grades comparison table

Uncoating grades

	ISO Code	ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR	
Application	P01			ST05												
P10	YC10			ST10	P10			ST10P	TH10			SRT			IC70	
P20	SMA			ST20	P20		UT120T	ST20E	KS20		SRT DX30	EX35			IC70 IC50M	
P30	SM30			ST30A	P30		UT120T	A30	KS15F UX30	PW30	SR30 DX30	EX35			IC50M IC54	
P40	YC40				P40			ST40E	TX40		SR30	EX45			IC54	
M10	H10A			U10	M10			EH510 U10E	TH10		UMN	WA10B	KU10 K313 K68	890	IC07	
M20	H13A			U20	M20		UT120T	EH520 U2	KS20		DX25 UMS	EX35	KU10 K313 K68	HX	IC07 IC08 IC20	
M30	H10F SM30			S130A			UT120T	A30	UX30		DX25 UMS	EX45			IC08 IC20 IC28	
M40				U40	M40				TU40		UM40	EX45			IC28	
K01	YD051			H02	UF1		HT105T	H1 H2	KS05F		KG03	WH05	KU10 K313 K68			
K10	YD201			H01	K10		HT110	EH10 EH510	TH10	KW10 GW15	KG10 KT9	WH10	KU10 K313 K68	890	IC20	
K20	YD201			G10	K20		UT120T	G10E EH20 EH520	KS15F KS20	GW25	CR1 KG20		KU10 K313 K68	HX	IC20	
K30				G3	K30		UT120T	G10E			KG30			883		
N01	H10 H13A							H1 H2	KS05F	KW10						
N10	YD101			H01	K10		WK1	WK10	HT10	EH10 EH510	TH10	KW10 GW15	KT9	WH10	KU10 K313 K68 H15	IC08 IC20
N20					K20		WK1	WK10	G10E EH20 EH520	KS15F		CR1	WH20	KU10 K313 K68	HX	IC08 IC20
N30							WK40	WMG40			KG30				H25	
S01							RT8005			SW05	KG03					
S10	YD101	H10 H10A H10F H13A	H01	K10	WK1		RT9005 RT9010 MT9015	RT9010 MT9015	EH10 EH510	KS05F TH10	SW10	FZ05 KG10	WH135	KU10 K313 K68	HX	IC07 IC08
S20					K20		WK1	WMG40	RT9010 TF15	EH20 EH520	KS15F KS20	SW25	FZ15 KG20	KU10 K313 K68	H25	IC07 IC08
S30							WMG40	TF15				KG30				

Turning

GENERAL TECHNICAL INFORMATION

Grades comparison table

Uncoating grades		ZCC.CT	SANDVIK	KORLOY	TaeguTec	WALTER	MITSUBISHI	SUMITOMO	TUNGALOY	KYOCERA	DIJET	HITACHI	KENNAMETAL	SECO	ISCAR
ISO Code	Application	P10	S1P								SRT				
P20	P		ST20	P30		UT120T	A30N				SRT DX30	EX35	K125M		IC50M IC28
P30			ST30A	P30		UT120T	A30N	UX30	PW30	SR30 DX30	EX35	GX			IC50M IC28
P40	YC30S		ST40						PW30	SR30	EX45				IC28
M10	M		U10	M10											
M20	YC30S		U20	M20		UT120T	A30N				UMN				
M30						UT120T	A30N				DX25 UMS	EX35			IC08 IC20
M40	SM30		U40	M40		UT120T	A30N				DX25 UMS	EX35			IC08 IC28
K01	YD051		H01	K10		HT105T					KG03				
K10	YD051		H05	H10	K10	WK10	HT10	G10E	TH10	KW10 GW25	KG10	WH10	K115M K313		IC20
K20	YD201		H13A	G10			UT120T	G10E		GW25	KT9 CR1 KG20			HX	IC20
K30								UT120T			KG30				

Insert index

A	D	G
ADKT-GM B236	CNMG-XM A54	ENMX□□-GM B241
ANGX-GM B239	CNMM-DR A57	ENMX□□R□-GM B241
ANGX-LH B239	CNMM-ER A57	G
APHT-AL B237	CNMM-LR A56	G□MD-GM A248
APHT-CBN B237	CNMM-HDR A58	G□MD-GM A249
APHT-PCD B237	CNMM-HPR A58	H
APHT-W B237	CPGT-SF A120	HNEX-DF B242
APKT-ALH B232	D	HNEX-DM B242
APKT-APF B238	DCGT-SF A100	HNEX-DR B242
APKT-APL B238	DCGT-USF A100	K
APKT-APM B238	DCGW A139	KNUX A91
APKT-PM/KM B239	DCGX-LC A103	L
C	DCGX-LH A103	LNGX-GM B245
CCGT-SF A95	DCMT-AHF A101	LNET-GM B244
CCGX-LC A99	DCMT-EF A101	LNKT-ZR B242
CCGX-LH A99	DCMT-EM A102	LNKT□PNR-GM B243
CCMT-EF A96	DCMT-HF A100	LNKT□PNR-GL B243
CCMT-AHF A96	DCMT-HM A102	LNMT□PNR-GM B243
CCMT-EG A97	DCMT-HR A102	LINUX-RF A94
CCMT-EM A97	DCMT-XF A100	LINUX-RH A94
CCMT-HF A97	DCMT-XM A101	LTO□W-□□GM A311
CCMT-HM A97	DNEG-NF A61	LTO□N-□□GM A312
CCMT-TC A98	DNEG-NGF A62	LTO□W-A(G)(N)□□ A313
CCMT-HR A98	DNMA A67	LTO□N-A(G)(N)□□ A313
CCMT-XF A95	DNMG-ADF A61	L
CCMT-XM A96	DNMG-DF A60	LTO□W-□□W A314
CNE□□□A/B B240	DNMG-DM A63	LTO□N-□□W A314
CNEG-NF A53	DNMG-DR A65	LTO□W-□□UN A315
CNMA A59	DNMG-EF A61	LTO□N-□□W A315
CNMG A59	DNMG-EM A64	LTO□W-□□BSPT A316
CNMG-ADF A53	DNMG-ER A65	LTO□N-□□BSPT A316
CNMG-DF A52	DNMG-EG A64	LTO□W-□□NPT A317
CNMG-DM A54	DNMG-NM A64	LTO□N-□□NPT A317
CNMG-DR A56	DNMG-PM A62	M
CNMG-EF A52	DNMG-SF A60	MPHT B246
CNMG-EG A55	DNMG-SNR A66	O
CNMG-EH A57	DNMG-TC A66	ODHT-GL B247
CNMG-EM A55	DNMG-XF A60	ODHT-GM B247
CNMG-ER A57	DNMG-XM A63	ODHT-GH B247
CNMG-NM A55	DNMM-DR A65	ODHT-LH B247
CNMG-PM A53	DNMM-ER A66	ODMT-GM B247
CNMG-SF A52	DNMM-LR A65	OFKT-DF B246
CNMG-SNR A57	DNMM-HDR A66	OFKT-DM B246
CNMG-TC A58	E	OFKT-LH B246
CNMG-XF A52	EDC-GD/KD/LD C224-228	ONHU-CM B247
	ENMX□□XR-GM B240	

Insert index

ONHU-GM	B248	SCMT-EF	A106	SNMG-SF	A69
ONHU-GH	B248	SCMT-EM	A107	SNMG-XF	A68
ONHU-GL	B248	SCMT-HF	A106	SNMG-XM	A70
ONHU-PF	B248	SCMT-HM	A107	SNMG-SNR	A75
ONHU-PM	B248	SCMT-HR	A108	SNMM-DR	A74
ONHU-W	B248	SCMT-XF	A106	SNMM-ER	A75
ONMU-GM	B248	SDMT-DM/PM/NM	B255	SNMM-LR	A72
ONMU-GH	B248	SDMT	B255	SNMM-HDR	A75
P					
PNEG-CF/CM/CR/PF/PM/PR	B249,250	SEET-CF	B256	SNMM-HPR	A76
PNEG□-GH/GL/GM	B249	SEET-CM	B256	SNMM-TC	A76
PNEG□-KH/KL/KM	B250	SEET-CR	B256	SPEX	B266
Q					
QC□DL	B251	SEET-DF	B256	SPGT-PM/EM	C212
QC□DR/L	A251-252	SEET-DM	B256	SPKR-GM	B265
QC□DR/L□□R	A252	SEET-DR	B256	SPKT	B265
R					
RCGX-LH	A104	SEET-EF	B256	SPKW	B265
RCKT-DM	B252	SEET-EM	B256	SPMR-M	B265
RCKT-DR	B252	SEET-LH	B256	SPMT	B263
RCKT-ER	B252	SEET-LH	B258	SPMT-PM/KM	B263
RCKT□MO-NM	B252	SEET-W	B256	SPMX-EM/LM/XM/XR	C210-211
RCM(G)T	A104	SEET□PER-APF	B258	SPDN	B264
RCMX	A105	SEET□PER-APM	B258	SPDN	B264
RDKW□MO	B253	SEET□PER-APR	B258	T	
ROHX	B253	SEHT-AL	B262	TBGH-L	A121
RP(D)MW(MT)-H/M/MM	B254	SEHT-CBN	B262	TCGT-SF	A109
RTO□W-□□GM	A312	SEHT-PCD	B262	TCGX-LC	A113
RTO□N-□□GM	A312	SEK(E)N	B257	TCGX-LH	A113
RTO□W-A(G)(N)□□	A313	SEKR-M	B257	TCMT-AHF	A111
RTO□N-A(G)(N)□□	A313	SNCU-W4	B261	TCMT-EF	A110
RTO□W-□□W	A314	SNGX-W	B259-261	TCMT-EG	A111
RTO□N-□□W	A314	SEMR-M	B257	TCMT-EM	A111
RTO□W-□□UN	A315	SNX□-GL/GM/GH	B259-261	TCMT-HF	A110
RTO□N-□□W	A315	SNGX-LH	B259	TCMT-HM	A112
RTO□W-□□BSPT	A316	SNEG-GM/HGR/W/GR	B258	TCMT-HR	A112
RTO□N-□□BSPT	A316	SNGU□-GM	B262	TCMT-XF	A109
RTO□W-□□NPT	A317	SNMA	A77	TCMT-XM	A111
RTO□N-□□NPT	A317	SNMG	A79	TNMA	A84
S					
SCGX-LC	A108	SNMG-ADF	A69	TNMG-ADF	A79
SCMT-XM	A107	SNMG-DF	A68	TNMG-DF	A78
SCGX-LH	A108	SNMG-DM	A71	TNMG-DM	A81
SCMT-AHF	A106	SNMG-DR	A73	TNMG-DR	A82
		SNMG-EF	A68	TNMG-EF	A79
		SNMG-EG	A72	TNMG-EG	A81
		SNMG-EM	A71	TNMG-EH	A82
		SNMG-ER	A74	TNMG-EM	A81
		SNMG-NM	A72	TNMG-ER	A83
		SNMG-PM	A70	TNMG-ES	A79

Insert index

TNMG-PM	A80	VNMG-XF	A85	ZOOEL□ISO	A294
TNMG-SF	A78	VNMG-XM	A86	ZOOELA(G)(N)□□	A296
TNMG-SNR	A83	VNMG-TC	A87	ZOOEL□OW	A297
TNMG-TC	A84	W			
TNMG-XF	A78	WCMX-53	C213	ZOOEL□OON	A298
TNMG-XM	A83	WCMX-PG	C213	ZOOEL□OBSPPT	A299
TNMM-DR	A83	WNEG-NF	A89	ZOOEL□ONPT	A300
TNMM-LR	A82	WNHU-GM	B267	ZOOIL□ISO	A295
TNMM-HDR	A84	WNHU-LH	B267	ZOOILA(G)(N)□□	A296
TPGH-L	A121	WNMA	A93	ZOOIL□OW	A297
TPGT-SF	A122	WNMG-ADF	A89	ZOOIL□OON	A298
TPKN	B266	WNMG-DF	A88	ZOOIL□OBSPT	A299
TPMR	B266	WNMG-DM	A91	ZOOIL□ONPT	A300
V					
VBET-NF	A118	WNMG-DR	A92	ZOOIR□ISO	A295
VBET-NGF	A118	WNMG-EF	A89	ZOOIRA(G)(N)□□	A296
VBGT-SF	A117	WNMG-EG	A91	ZOOIR□OWP	A302
VBMT-AHF	A118	WNMG-EH	A92	ZOOIR□OW	A297
VBMT-EF	A117	WNMG-EM	A91	ZOOIR□OWPP	A303
VBMT-EM	A118	WNMG-ES	A89	ZOOIR□OON	A298
VBMT-HF	A117	WNMG-NM	A92	ZOOIR□OONPP	A304
VBMT-HM	A119	WNMG-PM	A90	ZOOIR□OBSPT	A299
VBMT-HR	A119	WNMG-SF	A88	ZOOIR□OBSPTPP	A305
VBMT-SNR	A119	WNMG-SNR	A92	ZOOIR□ONPT	A300
VBMT-XF	A117	WNMG-TC	A93	ZOOIR□ONPTPP	A306
VBMT-XM	A118	WPGT	B267	ZDET	B269
VCGT-SF	A114	WPGT/-PM	B267	ZIGQ-NF	A246
VCGT-NF	A114	WNMG-XF	A88	ZIGQ-NM	A246
VCGT-NGF	A114	WNMG-XM	A90	ZILD-LC	A247
VCGX-LC	A116	X			
VCGX-LH	A116	XEEC	B268	ZIMF-NM	A244
VCMT-AHF	A114	XPHT-GM	B268	ZIMF-SM	A244
VCMT-XF	A114	XSEQ	B269	ZOHX-GF	B270
VCMT-XM	A115	Z			
VNEG-NF	A85	ZOER□ISO	A294	ZOHX-GM	B270
VNEG-NGF	A86	ZOER□ISOPP	A301	ZOHX-HM	B270
VNMG-ADF	A85	ZOERA(G)(N)□□	A296	ZPNT	B270
VNMG-DF	A85	ZOERA(G)(N)□□OPP	A302	ZPOD-MG	A241
VNMG-DM	A86	ZOER□OW	A297	ZPOS-MG	A241
VNMG-EF	A85	ZOER□OWPP	A303	ZQMX-1E	A253
VNMG-EG	A87	ZOER□OON	A298	ZROD-EG	A245
VNMG-EM	A86	ZOER□OONPP	A304	ZROD-LH	A247
VNMG-NM	A87	ZOER□OBSPT	A299	ZROD-MG	A245
VNMG-PM	A86	ZOER□OBSPTPP	A305	ZROD-NM	A245
VNMG-SF	A86	ZOER□ONPT	A300	ZTOD-EG	A243
VNMG-SNR	A87	ZOER□ONPTPP	A306	ZTOD-MG	A242

Tool index

1101SC05	C140-143	AL-2RL-AIR	B522	E
1105SC03	C140-143	AL-3E	B517	EMP01
1143SC120	C150	AL-3EL	B518	EMP02
1143SC90	C150	AL-3R-AIR	B523	EMP03
1165PA03	C144-147	AL-3RL-AIR	B524	EMP04
1534SP03C	C122-123	AL-3W	B520	EMP05
1534ST03C	C125-137	ALG-2E	B526	EMP09
1534SU03	C84-113	ALG-2R	B528	EMP09 BT/JT
1534SU03C	C84-113	ALG-3E	B527	EMP13
1534SH03	C139	ALG-3R	B529	F
1536ST05C	C125-137	ALU-3E	B513	FMA01
1536SU05	C84-113	B		FMA03
1536SU05C	C84-113	BMR01	B150	FMA04(OFKT05□□)
1538SU08C	C84-113	BMR02	B152	FMA04(ODHT/ODMT06□□)
1557SU03	C114	BMR03	B154-157	FMA07
1576PC05	C148-149	BMR04	B167-168	FMA08
1579PC15C	C148-149	C		FMA11
1588SL12/20/30C	C118-121	C40X-Q□DR/L	A268	FMA12
1734SU03C	C84-113	C□□□-SCLPR/L	A217	FMA14
1736ST05C	C125-137	C□□□-SDQPR/L	A218	FMA17
1736SU05C	C84-113	C□□□-SDUPR/L	A219	FMD02(PN11)
3101H7	C236	C□□□-STUPR/L	A220	FMD02(HN09)
3102H7	C237	C□□□-SVQCR/L	A221	FMD03
3103H7	C238	C□□□-SVUCR/L	A221	FME02
4111	C236	CM-2E	B538	FME03
4122A	C250-251	CM-4E	B539	FME04
4122M	C252-253	CMA01	B225	FMP01
4201A	C258-259	CMD01	B226	FMP02
4201C	C254-255	CMZ01	B224	FMP03
4202A	C260-261	C□□□-Q□DR/L	A268	FMP12
4202C	C256-257	D		FMP17
4222A	C250-251	DCLNR/L	A136	FMR01
4222M	C252-253	DDJNR/L	A137	FMR02
A		DSBNR/L	A138	FMR03
AMA01	B29	DTGNR/L	A139	FMR04
AMP01	B31	DVJNR/L	A140	FMR11
AL-2B	B519	DVVNN	A140	G
AL-2E	B515	DWLNR/L	A141	GD03
AL-2EL	B516			GD03C
AL-2R-AIR	B521			

Tool index

GD05	C9-44	GQCR/L	A280	MTFNR/L	A165	
GD05C	C11-44	H			MTGNR/L	A162
GD08C	C11-41	HMX-2B	B460	MTJNR/L	A163	
GED□OR/L	A269-271	HMX-2BFP	B462	MTJNR/L□Z	A164	
GFD□OR/LL	A272-275	HMX-2BL/M/X	B461	MVJNR/L	A167	
GFD□OR/L	A276-277	HMX-2BP	B466-467	MVVNN	A166	
GID□OR/L	A278	HMX-2BS	B465	MWLNR/L	A168	
GM-2B	B432	HMX-2E	B446-447	N		
GM-2BFP	B434	HMX-2EBL/X	B449	NM-2B	B508	
GM-2BL/M/X	B433	HMX-2EFP	B448	NM-2BP	B509-510	
GM-2BP	B438-439	HMX-2EP	B457-458	NM-2E	B505	
GM-2BS	B437	HMX-2ES	B459	NM-2EP	B507	
GM-2E	B405	HMX-4B	B463	NM-4E	B506	
GM-2EBL/X	B411	HMX-4BL	B464	P		
GM-2EFP	B410	HMX-4E	B450-451	PCBNR/L	A142	
GM-2EL	B407	HMX-4EBL/X	B454	PCLNR/L	A143	
GM-2EP	B429-430	HMX-4EFP	B453	PDJNR/L	A144	
GM-2ES	B431	HMX-4EL	B452	PDPNN	A145	
GM-2EX	B409	HMX-4R	B468-469	PM-2B	B382	
GM-2F	B460	HMX-4RBL/M/X	B470	PM-2BC	B387-390	
GM-2FL	B408	HMX-4RF	B471	PM-2BFP	B384	
GM-2R	B440	HMX-4RP	B472	PM-2BL/M/X	B383	
GM-3E	B412-413	HMX-6R-MAX	B473	PM-2E	B358	
GM-3EL	B414	HMX-6E	B455	PM-2EBL/X	B363	
GM-4B	B435	HMX-6EL	B456	PM-2EFP	B362	
GM-4BL/M/X	B436	HMP01	B219-220	PM-2EL	B360	
GM-4E	B422-423	HMP01 EC	B221	PM-2F	B359	
GM-4EBL/X	B426	M			PM-2FL	B361
GM-4EBL/X-G	B421	MCBNR/L	A154	PM-2R	B391-392	
GM-4EFP	B425	MCLNR/L	A155	PM-3E-H	B364	
GM-4E-G	B415-416	MDJNR/L	A156	PM-3EL-H	B365	
GM-4EL	B424	MDPNN	A157	PM-4B	B385	
GM-4EL-G	B418	MM-4E	A490	PM-4BL/M/X	B386	
GM-4EX-G	B420	MM-4EF	A491	PM-4E	B373-374	
GM-4F-G	B417	MM-4R	A492	PM-4EBL/X	B379	
GM-4FL-G	B419	MM-4RFP	A493	PM-4EBL/X-G	B372	
GM-4R	B441	MSBNR/L	A158	PM-4EFP	B378	
GM-4RL/M/X	B442-443	MSDNN	A161	PM-4E-G	B366-367	
GM-4W	B444	MSKNR/L	A160	PM-4EL	B375	
GM-6E	B427	MSRNR/L	A159	PM-4E-H	B376	
GM-6EL	B428					

Tool index

PM-4EL-H	B377	PML-6EL	B346	QCH-XPHT	B158
PM-4EL-G	B369	PMX-4E	B315-316	QCH-ZOHX	B169
PM-4EX-G	B371	PMX-4EBL/X	B317	QECDR/L	A257
PM-4F-G	B368	PMX-4EFP	B318	QECSR/L	A258
PM-4FL-G	B370	PMX-4R	B319-320	QEOSDN	A259
PM-4H	B401	PMX-4RBL/X	B321-322	QEOR/L	A256-257
PM-4HL	B402	PMX-2B	B324	QFDR/L-H	A266-267
PM-4R	B393-394	PMX-2BL/M/X	B325	QFDR/L-L	A260-261
PM-4RBL/M/X	B395-396	PMX-2BFP	B326	QFDR/LL	A262-265
PM-4RBL/M/X-H	B399	PSBNR/L	A146	QXDR/L	A258
PM-4R-H	B397-398	PSDNN	A147	QZQDR/L	A282
PM-4RFP	B400	PSKNR/L	A148	QZS	A259
PM-6E	B380	PSSNR/L	A149		R
PM-6EL	B381	PTFNR/L	A150	RM-4E	B476
PML-2B	B347	PTGNR/L	A152	RM-5E	B477
PML-2BFP	B349	PTTNR/L	A151	RM-6E	B478
PML-2BL	B348	PWLNR/L	A153	RM-4B	B479
PML-2E	B328		Q	RM-4R	B480-482
PML-2EFP	B332	Q□-HMX-2B/4B	B666	RM-5R	B483-485
PML-2EL	B330	Q□-HMX-4E	B665	RM-6R	B486
PML-2F	B329	Q□-HMX-4R	B667	RM-7R	B487-488
PML-2FL	B331	Q□-PM-2B/4B	B661		S
PML-2R	B352	Q□-PM-4E	B660	SCACR/L	A169
PML-3E-H	B333	Q□-PM-4R	B662	SCLCR/L	A170
PML-3EL-H	B334	Q□-VPM-4E	B663	SDACR/L	A171
PML-4B	B350	Q□-VPM-4R	B664	SDJCR/L	A172
PML-4BL	B351	Q□-XM-2B	B670	SDNCN	A173
PML-4E	B340	Q□-XM-2C	B671	SM-3E	B532
PML-4EFP	B341	Q□-XM-2CR	B672	SM-4R	B535
PML-4E-G	B335	Q□-XM-2E	B668	SMP01	B175-176
PML-4EL	B341	Q□-XM-2R	B669	SMP03	B178-179
PML-4E-H	B342	QCH-AD	B129	SMP05	B182
PML-4EL-H	B343	QCH-AN	B148	SMP08	B184-187
PML-4EL-G	B337	QCH-APKT	B122	SMP09	B189-192
PML-4EX-G	B339	QCH-EN	B210	SNR/L	A320
PML-4F-G	B336	QCH-LN	B141	S□□□-PCLNR/L	A194
PML-4FL-G	B338	QCH-M	B114	S□□□-PDPNR/L	A195
PML-4R	B353	QCH-RD	B110	S□□□-PDUNR/L	A196
PML-4R-H	B354	QCH-SDMT	B196	S□□□-PSKNR/L	A197
PML-4RFP	B355	QCH-WN	B98	S□□□-PTFNR/L	A198
PML-6E	B345	QCH-WPGT	B200		

Tool index

S□□□-PWLNR/L	A199	SVABR/L	A175	UM-4RL	B311
S□□□-SCFCR	A214	SVJBR/L	A174	V	
S□□□-SCLCR	A200	SVJCR/L	A178	VPM-4E	B298
S□□□-SCLCR/L	A215	SVVBN	A176	VPM-4EBL/X	B299
S□□□-SCLPR/L	A210	SVVCN	A177	VPM-4EFP	B300
S□□□-SDQCR/L	A201	S□□□-QC□□□OR/L	A280	VPM-4R	B301-302
S□□□-SDQPR/L	A211	SWR/L	A319	VPM-4RBL/X	B303-304
S□□□-SDUCR/L	A202	T		VPM-4RFP	B305
S□□□-SDUPR/L	A212	TM-4E	B495	VSM-4E	B533
S□□□-SDZCR/L	A203	TM-4B	B496	VSM-4EFP	B534
S□□□-SSKCR/L	A204	TM-4R	B497-499	VSM-4R	B536
S□□□-STFCR/L	A205	TM-4RP	B500	VSM-4RFP	B537
S□□□-STUPR/L	A213	TM-5R	B501-502	X	
S□□□-SVQBR/L	A208	TM-6R	B503	XMP01	B215
S□□□-SVQCR/L	A206	TMP01	B217	XMR01	B194-199
S□□□-SVUBR/L	A209	U		XMR03	B206
S□□□-SVUCR/L	A207	UD03	C47-82	XMR12	B208-209
SRDCN	A186	UD03C	C49-82	Z	
SRGCR/L	A187	UD05	C47-82	ZD02/03/04/05	C200-207
SSBCR/L	A179	UD05C	C49-82	ZTD02/03/04/05	C196-199
SSDCN	A180	UM-4E	B307	ZTK015/03/04/05/08	C219-223
SSKCR/L	A181	UM-4EFP	B309	ZSD02/03/04/05	C181-192
SSSCR/L	A182	UM-4EL	B308	ZSIR/L	A309
STACR/L	A183	UM-4R	B310	ZSER/L	A308
STFCR/L	A184	UM-4RFP	B312		
STGCR/L	A185				

